

AVIATION MAINTENANCE TECHNICIAN CERTIFICATION SERIES

HELICOPTER AERODYNAMICS STRUCTURES AND SYSTEMS

12



EASA 2023-889 COMPLIANT

Update notices for this book will be available online at www.actechbooks.com/revisions.html
If you would like to be notified when changes occur, please join our mailing list at www.actechbooks.com

VERSION	EFFECTIVE DATE	DESCRIPTION OF REVISION(S)
001	2022.03	Module creation and release.
001.1	2022.03	Label correction for Figure 2-1, page 2.2
001.2	2022.10	Inclusion of Measurement Standards for clarification, page iv. Enhanced or modified content within the following Submodules: 12.9(A): Moved content on emergency escape lighting from page 9.14 to 9.5. 12.13: Expanded content on Wiper Systems. 12.14: Expanded content on Emergency Pop-out Floats. 12.19: Added section; Miscellaneous Information Systems.
002	2023.01	Minor type corrections and Figure replacement. Replaced Figures 14-54 on page 14.30, Figure 15-9 on page 15.5, and Figure 18-4 and 18-5 on page 18.5.
003	2024.10	Regulatory update for EASA 2023-989 compliance.

Module was reorganized based upon the EASA 2023-989 subject criteria. Enhancements included in this version 003 are:

- 12.7.2 *Test Equipment for Avionics* - topic added.
- 12.10 *Portable Fire Extinguishers* - topic added.
- 12.12 *Servicing Hydraulic Systems* - topic added.
- 12.16 *Pneumatic Systems* - topic deleted per 2023-989.
- 12.18 *Printing and Structural Monitoring* - topics deleted per 2023-989.

TABLE OF CONTENTS

HELICOPTER AERODYNAMICS STRUCTURES AND SYSTEMS

Revision Log	iii
Measurement Standards	iv
Basic Knowledge Requirements	v
Part 66 Basic Knowledge Requirements	vi
Table of Contents	ix

12.1 THEORY OF FLIGHT — ROTARY WING AERODYNAMICS..... 1.1

Historical Perspective	1.1
Introduction to Theory of Flight	1.3
Terminology	1.4
Effects of Gyroscopic Precession	1.6
Torque Reaction and Directional Control	1.7
Torque Reaction	1.7
Directional Control	1.7
Dissymmetry Of Lift, Blade Tip Stall	1.8
Vertical Flight	1.8
Forward Flight	1.8
Translational Lift	1.9
Effective Translational Lift (ETL)	1.9
Airflow In Forward Flight	1.9
Dissymmetry Of Lift	1.9
Blade Tip Stall	1.10
Translating Tendency and Correction	1.11
Coriolis Effect and Compensation	1.11
Coning	1.11
Coriolis Effect	1.12
Vortex Ring State, Power Settling, Overpitching	1.12
Vortex Ring State/Power Settling	1.12
Overpitching	1.13
Autorotation	1.13
Hovering Autorotation	1.13
Ground Effect	1.14
In Ground Effect (IGE)	1.14
Out of Ground Effect (OGE)	1.14
Submodule 1 Practice Questions	1.17
Submodule 1 Practice Answers	1.18

12.2 FLIGHT CONTROL SYSTEMS (ATA 67)2.1

Introduction	2.1
Cyclic Control	2.1
Collective Control	2.2
Throttle Control	2.2
Correlator	2.3
Governor	2.3
Swashplate	2.3
The Cyclic Movement and The Swashplate	2.3
Longitudinal and Lateral Movement	2.4
The Collective Movement and The Swashplate	2.4
Yaw Control: Anti-Torque Control, Tail Rotor, Bleed Air	2.5
Anti-Torque Control, Tail Rotor	2.5
The Tail Collective Hinge	2.6
The Tail Flapping Hinge	2.6
The Tail and Pedal Connection	2.6
Different Solutions	2.7

The Fenestron Solution	2.8
The Bleed Air NOTAR System	2.9
Main Rotor Head: Design and Operation Features	2.9
Fully Articulated Rotor Systems	2.10
Semi-Rigid Rotor Systems	2.11
Rigid Rotor Systems	2.12
Bearingless Rotor Systems	2.12
Blade Dampers: Function and Construction	2.12
Hydraulic Damper	2.13
Multiple Disk Damper	2.13
Elastomeric Damper	2.13
Rotor Blades: Main And Tail Rotor Blade Construction and Attachment	2.13
Main And Tail Rotor Blade Construction and Attachment	2.14
Wooden Rotor Blades	2.14
Metal Rotor Blades	2.14
Composite Rotor Blades	2.15
Blade Attachment	2.15
Tail Rotor Blade Construction and Attachment	2.16
Blade Construction	2.16
Blade Attachment	2.16
Fenestron Tail Rotors	2.17
Fenestron Blade Construction	2.18
Fenestron Blade Attachment	2.18
NOTAR Type Anti-Torque Rotor	2.19
NOTAR Blade Construction	2.19
NOTAR Blade Attachment	2.19
Trim Control, Fixed And Adjustable Stabilizers	2.19
Vertical and Horizontal Stabilizers	2.19
System Operation: Manual, Hydraulic, Electrical and Fly-By-Wire	2.21
Manual Operation	2.21
Hydraulic Operation	2.21
Electrical Fly-By-Wire Operation	2.21
Stability Augmentation System (SAS)	2.21
SAS Components	2.21
SAS Operations	2.22
Artificial Feel	2.22
Friction	2.22
Elastic Rod	2.23
Hydraulic Damper	2.23
Balancing and Rigging	2.23
Rods	2.23
Transmission Unit	2.24
Relay	2.24
Balancing	2.24
Bellcrank	2.24
Rigging	2.26
Submodule 2 Practice Questions	2.29
Submodule 2 Practice Answers	2.30

12.3 BLADE TRACKING AND VIBRATION ANALYSIS (ATA 18).....3.1

Introduction	3.1
Vibration Types	3.1
Vibration Example	3.1
Imbalance	3.2

TABLE OF CONTENTS

Track	3.2	Station Identification System.	5.3
Ground Resonance	3.3	Stress, Strain, Bending, Compression, Shear, Torsion,	
Vibration Reduction Methods.	3.4	Tension, Hoop Stress, and Fatigue	5.4
Amplitude Reduction	3.4	Stress and Strain	5.5
Vibration Opposition	3.4	Tension.	5.5
Static and Dynamic Balancing	3.5	Compression	5.5
Static Balancing	3.5	Torsion	5.5
Dynamic Balancing	3.6	Shear	5.5
Rotor Alignment	3.7	Bending	5.5
Main Rotor and Tail Rotor Tracking	3.8	Hoop Stress	5.6
Submodule 3 Practice Questions	3.11	Metal Fatigue.	5.6
Submodule 3 Practice Answers	3.12	Drains and Ventilation Provisions	5.6
		Drains	5.6
		Ventilation	5.6
		System Installation Provisions	5.6
		Lightning Strike Protection Provisions	5.7
		Bonding Procedures and Precautions	5.7
		Section B	5.7
		Construction Methods of: Stressed Skin Fuselage, Formers,	
		Stringers, Longerons, Bulkheads, Frames, Doublers, Struts,	
		Ties, Beams, Floor Structures, Reinforcement, Methods of	
		Skinning and Anti-Corrosive Protection	5.7
		Truss Type	5.7
		Stressed Skin Fuselage.	5.8
		Bonded and Composite Construction	5.9
		Formers, Stringers, Longerons, Bulkheads, Frames	5.9
		Doublers.	5.9
		Struts and Ties	5.9
		Beams, Floor Structures, and Reinforcements	5.9
		Skinning.	5.10
		Anti-Corrosive Protection	5.10
		Pylon, Stabilizer, and Undercarriage Attachments	5.10
		Fuselage and Tail Structure	5.10
		Pylon	5.11
		Stabilizer	5.11
		Undercarriage Attachments	5.11
		Seat Installation	5.11
		Doors: Construction, Mechanisms, Operation, and Safety	
		Devices	5.11
		Windows and Windscreen Construction	5.12
		Fuel Storage	5.13
		Firewalls.	5.13
		Engine Mounts	5.13
		Structure Assembly Techniques: Riveting, Bolting, Bonding .	5.13
		Riveting, Bolting	5.13
		Bonding	5.13
		Methods of Surface Protection: Chromating,	
		Anodizing, Painting, and Cladding	5.13
		Anodizing	5.14
		Chromating	5.14
		Painting	5.14
		Cladding	5.14
		Surface Cleaning	5.14
		Exterior Aircraft Cleaning	5.14
		Snow and Ice	5.15
		Salt Air Operating Environment.	5.15
12.4 TRANSMISSION	4.1		
Introduction: Power Transmission	4.1		
Gear Boxes, Main and Tail Rotors	4.1		
Gear Boxes	4.1		
Main and Tail Rotors	4.1		
Clutches, Free wheel Units and Rotor Brakes	4.3		
Clutches	4.3		
Free Wheel Units	4.4		
Rotor Brakes	4.5		
Tail Rotor Drive Shafts, Flexible Couplings, Bearings,			
Vibration Dampeners and Bearing Hangers	4.5		
Tail Rotor Drive Shafts	4.5		
Flexible Couplings	4.5		
Bearings	4.6		
Bearings for Transmissions	4.6		
Elastomeric Bearings	4.6		
Maintenance of Bearings	4.7		
Vibration Dampers	4.7		
Classification of Vibration Dampers	4.7		
Resonant Mass	4.7		
Nodal Beam	4.7		
Pendulum Damper or Bifilar	4.7		
Hydraulic Damper	4.7		
Computer Controlled Dampers	4.7		
Bearing Hangers	4.7		
Submodule 4 Practice Questions	4.9		
Submodule 4 Practice Answers	4.10		
12.5 AIRFRAME STRUCTURES	5.1		
Airworthiness Requirements for Structural Strength	5.1		
Certification Specification (CS) 27	5.1		
Certification Specification (CS) 29	5.1		
Structural Classification, Primary, Secondary, Tertiary	5.2		
Primary Structure	5.2		
Secondary Structure	5.2		
Tertiary Structure	5.2		
Fail Safe, Safe Life, Damage Tolerance Concepts	5.2		
Fail-Safe Concept	5.2		
Examples of Fail Safe Design Techniques	5.3		
Safe Life Concept	5.3		
Damage Tolerance Concept	5.3		
Zonal and Station Identification Systems	5.3		
Zonal System	5.3		

TABLE OF CONTENTS

Acrylic Windows	5.15
Airframe Symmetry: Methods of Alignment and Symmetry Checks	5.15
Lateral Control of the Tail Position	5.15
Horizontal Control of the Tail Position	5.15
Submodule 5 Practice Questions	5.19
Submodule 5 Practice Answers	5.20

12.6 AIR CONDITIONING (ATA 21)6.1

12.6.1 - Air Supply	6.1
Sources of Air Supply Including Engine Bleed and Ground Cart	6.1
Certification Specifications	6.1
Extract from EASA CS 29.831 Ventilation	6.1
Ram Air	6.1
Bleed Air	6.1
Bleed Air From an Engine	6.1
Bleed Air From an APU	6.2
Ground Cart	6.2
Heated Air Sources	6.2
Heaters	6.2
Heat Exchangers	6.2
Combustion Heaters	6.2
Humidity Control	6.2
12.6.2 - Air Conditioning	6.2
Air Conditioning Systems	6.2
Vapor Cycle Air Conditioning	6.3
Basic Vapor Cycle	6.3
Vapor Cycle Air Conditioning System Components	6.4
Refrigerant	6.4
Receiver Dryer	6.5
Thermal Expansion Valve	6.5
Evaporator	6.6
Compressor	6.7
Condenser	6.8
Service Valves	6.8
Vapor Cycle Air Conditioning Servicing Equipment	6.9
Manifold Set, Gauges, Hoses, and Fittings	6.9
Full Service Refrigerant Recovery, Recycling, Evacuation, and Recharging Units	6.10
Refrigerant Source	6.10
Vacuum Pumps	6.11
Leak Detectors	6.11
System Servicing	6.11
Visual Inspection	6.11
Leak Test	6.12
Performance Test	6.12
Feel Test	6.12
Purging The System	6.13
Checking Compressor Oil	6.13
Evacuating The System	6.13
Charging The System	6.13
Air-Cycle Air Conditioning	6.14
System Operation	6.14
Pneumatic System Supply	6.14
Component Operation	6.14

Pack Valves	6.14
Bleed Air Bypass	6.15
Primary Heat Exchanger	6.15
Refrigeration Turbine Unit and Secondary Heat Exchanger	6.15
Refrigeration Bypass Valve	6.16
Distribution Systems	6.16
Air Ducts	6.17
Flow and Temperature Control Systems	6.17
Flow Control System	6.17
Temperature Control System	6.17
Air Conditioner Control Panel	6.17
Temperature	6.17
Fan Speed	6.17
Mode Selection	6.17
Protection and Warning Devices	6.18
Submodule 6 Practice Questions	6.21
Submodule 6 Practice Answers	6.22

12.7 INSTRUMENTS/AVIONICS SYSTEMS..... 7.1

Introduction	7.1
Classification by Type	7.3
Flight Instruments	7.3
Engine Instruments	7.3
Navigation Instruments	7.3
Pitot-Static Instruments	7.4
Altimeter, Air Speed Indicator, Vertical Speed Indicator	7.4
Pitot Tubes and Static Vents Principle	7.4
Altimeters	7.4
Airspeed Indicators	7.9
Vertical Speed Indicator	7.10
Gyroscopic Instruments	7.11
Artificial Horizon, Attitude Director, Direction Indicator, Horizontal Situation Indicator, Turn and Slip Indicator, Turn Coordinator	7.11
Gyroscopic Principles	7.11
Ring Laser Gyro	7.12
Micro Electro Mechanical System (MEMS)	7.13
Artificial Horizon	7.14
Attitude Director	7.15
Direction Indicator	7.15
Horizontal Situation Indicator	7.16
Turn and Slip Indicator	7.17
Turn Coordinators	7.18
Compasses	7.18
Direct Reading, Remote Reading	7.18
Direct Reading	7.18
Magnetic Deviation	7.18
Magnetic Variation	7.19
Dip Error	7.19
Vertical Magnetic Compasses	7.19
Remote Reading	7.20
Vibration Indicating Systems (HUMS)	7.21
Glass Cockpit	7.22
Other Aircraft System Indications	7.22
Remote Sensing and Indications	7.22
Synchro Type Remote Indicating Instruments	7.23

TABLE OF CONTENTS

DC Selsyn Systems	7.23	Weather Avoidance Radar	7.54
AC Synchro Systems	7.24	Radio Altimeter (RA)	7.54
Remote Indicating	7.25	Avionics General Test Equipment	7.55
Fuel And Oil Pressure Gauges	7.25	Built in Test Equipment	7.55
Mechanical Movement Indicators	7.25	Avionics Test Equipment	7.55
Tachometers	7.25	Multimeters	7.55
Electric Tachometers	7.26	Oscilloscope	7.55
Collective Pitch Transmitter	7.28	Time Domain Reflectometer (TDR)	7.56
Temperature Measuring Instruments	7.28	Pitot-Static Test Equipment	7.56
Non-Electric Temperature Indicators	7.28	Specialized Test Equipment	7.56
Electric Temperature Indicators	7.29	Data Bus Analyzers	7.56
Ratiometer Electrical Resistance Thermometers	7.30	Test Equipment Calibration	7.57
Thermocouple Temperature Indicators	7.30	Submodule 7 Practice Questions	7.59
Turbine Gas Temperature Indicating Systems	7.31	Submodule 7 Practice Answers	7.60
Pressure Measuring Instruments	7.33		
Types of Pressure	7.35	12.8 ELECTRIC POWER (ATA 24).....	8.1
Engine Oil Pressure Instruments	7.36	Batteries: Installation and Operation	8.1
Manifold Pressure Instruments	7.36	Lead-Acid Batteries	8.1
Fuel Pressure Instruments	7.37	Valve Regulated (Sealed) Lead-Acid Batteries (VRLA) . . .	8.1
Hydraulic Pressure Instruments	7.37	Nickel Cadmium Batteries (NiCd)	8.2
Vacuum Pressure Instruments	7.37	Lithium-Ion Batteries	8.2
Pressure Switches	7.37	Battery Specifications	8.3
12.7.2 Avionics Systems (ATA 22, 23, 34)	7.38	Capacity	8.3
Autoflight (ATA 22)	7.38	Battery Ratings by Specification	8.3
Stability Augmentation System	7.38	Battery Installation	8.3
Basic Autopilots (3-Axes)	7.38	Battery Charging	8.3
Superior Modes of 3-Axes Autopilots	7.39	Constant Voltage Charging	8.4
Superior Modes of 4-Axes Autopilots	7.39	Constant Current Charging	8.4
Automatic Transition to the Hover	7.39	Battery Maintenance	8.4
Communications (ATA 23)	7.40	Battery Overheating	8.4
Very High Frequency (VHF) Radios	7.40	Battery Freezing	8.5
High Frequency (HF) Radios	7.40	Electrolyte Spillage	8.5
Satellite Communication Systems	7.40	Storage of Batteries	8.5
Service Interphone System	7.40	Battery Ventilation Systems	8.5
Navigation Systems (ATA 34)	7.40	AC And DC Power Generation	8.5
Automatic Direction Finder (ADF)	7.43	AC Power Generation	8.5
Radio Magnetic Indicator (RMI)	7.44	Alternator Drive	8.7
Instrument Landing Systems (ILS)	7.44	AC Alternator Control Systems	8.8
Localizer	7.45	Emergency Power Generation	8.10
Glideslope	7.45	Voltage Regulation, Circuit Protection	8.10
Compass Locators	7.46	Voltage Regulation	8.11
Marker Beacons	7.46	Parallel Generator Operations	8.11
Microwave Landing System (MLS)	7.47	Differential Voltage	8.11
MLS Expansion Capabilities	7.48	Generator Controls for High Output Generators	8.11
Flight Director Systems; Distance Measuring Equipment (DME)	7.48	Other Voltage Regulation	8.11
Area Navigation Systems (RNAV)	7.49	Carbon Pile Regulators	8.11
Flight Management System	7.49	Three Unit Regulators	8.12
Satellite Navigation Systems	7.49	Circuit Protection	8.13
Inertial Navigation System (INS)	7.50	Reverse Current Sensing	8.13
Air Traffic Control Transponder, Secondary		Over Voltage Protection	8.13
Surveillance Radar	7.51	Over Excitation Protection	8.13
Secondary Surveillance Radar	7.51	Current Limiting Devices	8.13
Transponder Tests and Inspections	7.52	Fuses	8.14
Altitude Encoders	7.52	Circuit Breakers	8.14
Traffic Alert and Collision Avoidance System (TCAS)	7.53	Power Distribution	8.14
		Power Distribution on Small Multi-Engine Aircraft	8.14

TABLE OF CONTENTS

Power Distribution on Large Aircraft	8.16	Four Point Sling Assembly	9.9
Split Bus Systems	8.16	Load Cell	9.9
Parallel Bus Systems	8.17	Frangible Link	9.9
Split Parallel Systems	8.17	Section B	9.9
Inverters, Transformers, and Rectifiers	8.19	Emergency Floatation Systems	9.9
Inverters	8.19	Cabin Layout and Cargo Retention	9.10
Rotary Inverters	8.19	Cargo Retention	9.10
Permanent Magnet Rotary Inverters	8.19	Equipment Layout	9.10
Inductor Type Rotary Inverters	8.20	Cabin Furnishing Installation	9.11
Static Inverters	8.21	Submodule 9 Practice Questions	9.13
Transformers	8.22	Submodule 9 Practice Answers	9.14
Voltage Transformers	8.24		
Power Transformers	8.24	12.10 FIRE PROTECTION (ATA 26).....	10.1
Audio Transformers	8.25	Section A	10.1
RF Transformers	8.25	Fire Protection	10.1
Autotransformers	8.25	Requirements for Fire to Occur	10.1
Current Transformers	8.25	Classes of Fires	10.1
Transformer Losses	8.25	European Class System	10.1
Power In Transformers	8.25	American Class System	10.1
Rectifiers	8.25	Fire Zones	10.1
Silicon Controlled Rectifiers	8.26	Fire Prevention	10.2
Transformer Rectifiers	8.28	Requirements of EASA Certification Specifications (CS)	10.2
External/Ground Power	8.28	CS 29.1181 Designated Powerplant Fire Zones Include	10.2
Submodule 8 Practice Questions	8.31	CS 29.1194 Other Surfaces	10.2
Submodule 8 Practice Answers	8.32	CS 29.1195 Fire Extinguishing Systems	10.2
		Fire and Smoke Detection and Warning Systems	10.2
12.9 EQUIPMENT AND FURNISHINGS (ATA 25).....	9.1	Requirements For Overheat and Fire Detection Systems	10.2
Section A	9.1	Thermal Switch Systems	10.3
Emergency Equipment Requirements	9.1	Thermocouple Systems	10.3
Fire Extinguishers	9.1	Continuous Loop Systems	10.4
First-Aid Kits	9.2	Fenwal System	10.4
Maintenance of First-Aid Kits	9.2	Kidde System	10.4
Crew Survival Kits	9.2	Sensing Elements	10.4
Life Jackets	9.2	Sensing Element Fault Indication	10.5
Life Rafts	9.3	Combination Fire and Overheat Warning	10.5
Emergency Locator Transmitter (ELT)	9.3	Temperature Trend Indication	10.5
Types of ELTs	9.3	Support Tube Mounted Sensing Elements	10.5
Emergency Lighting and Marking	9.4	Dual Loop Systems	10.5
Supplemental Oxygen	9.4	Fire Detection System Maintenance	10.5
Determination of Oxygen	9.4	Fire Detection System Troubleshooting	10.6
Seats, Harnesses, And Belts	9.4	Flame Detectors	10.7
Seats	9.4	Smoke Detection Systems	10.7
Emergency Exit Marking	9.4	Light Refraction Type	10.7
Escape Slides	9.5	Ionization Type	10.7
Seat Belts and Harnesses	9.5	Carbon Monoxide Detectors	10.7
CS-29.561 Requirements	9.5	Carbon Monoxide Chemical Detectors	10.8
Passenger Seats	9.6	Carbon Monoxide Monitors (Sensors)	10.8
Crew Seats	9.6	Fire Extinguishing Systems	10.8
Lifting Systems	9.6	Fire Extinguisher Agents	10.8
Rescue Hoists	9.6	Water - Class A	10.8
Electric Hoists	9.6	Carbon Dioxide (CO ₂) - Class B or C	10.8
Electric Hoist Operation	9.7	Dry Powder Chemicals - Class B, C or D	10.8
Hover Trim Control	9.7	Halogenated Hydrocarbons - Class A, B, or C	10.8
Electric Hoist Safety Systems	9.8	Fixed Container Fire Extinguishing Systems	10.9
Hydraulic Hoists	9.8	Containers	10.9
Cargo Hooks	9.8	Discharge Valves	10.9

TABLE OF CONTENTS

Pressure Indication	10.10	Generalities on Fuel Pumps.....	11.10
Two Way Check Valve.....	10.10	Centrifugal Boost Pumps	11.11
Discharge Indicators	10.10	Ejector Pumps	11.12
Thermal Discharge Indicator (Red Disk)	10.10	Fuel Filters	11.12
Normal Discharge Indicator (Yellow Disk).....	10.10	Gaskets, Seals and Packings	11.13
Fire Switch.....	10.10	Troubleshoot the Fuel System	11.14
Fire Extinguisher System Maintenance	10.10	Dumping, Venting and Draining	11.14
Container Pressure Check	10.10	Dumping	11.14
Discharge Cartridges.....	10.11	Fuel Vent Systems	11.15
Agent Containers.....	10.11	Fuel System Drains	11.15
Portable Fire Extinguishers.....	10.11	Cross Feed and Transfer	11.16
Portable Extinguisher Types	10.11	Lateral Balance Systems	11.16
Halon Fire Extinguishers	10.11	Cross Feed and Transfer	11.16
Pressurized Water Extinguishers	10.12	Indications and Warnings	11.16
Non-Suitable Extinguishers	10.12	Fuel Quantity Indicating Systems.....	11.17
Maintenance and Inspection	10.12	Ratiometer Type	11.17
System Tests.....	10.12	Capacitance Type.....	11.17
Continuous Loop Fire Detection System	10.12	Mechanical Type	11.18
Dual Loop Systems Automatic Self Interrogation	10.13	Fuel Heating	11.20
Fire Detection Control Unit (Fire Detection Card)	10.13	Fuel Pressure Gauges.....	11.20
Section B	10.13	Pressure Warning Signal	11.21
Portable Fire Extinguishers.....	10.13	Fueling and Defueling	11.21
Cockpit and Cabin Interiors	10.13	Fueling	11.21
Portable Extinguisher Types	10.13	Refueling by Gravity	11.22
Operation of Portable Fire Extinguishers.....	10.14	Pressure Refueling.....	11.22
Inspection of Portable Fire Extinguishers.....	10.14	Defueling	11.22
Maintenance of Portable Fire Extinguishers.....	10.14	Fire Hazards When Fueling or Defueling	11.22
Submodule 10 Practice Questions.....	10.15	Fuel Contamination.....	11.23
Submodule 10 Practice Answers	10.16	Water	11.23
12.11 FUEL SYSTEMS (ATA 28).....	11.1	Solid Particle Contaminants	11.24
Introduction	11.1	Surfactants	11.24
Fuel System Layout	11.1	Microorganisms	11.25
Gravity Feed Systems	11.2	Improper Fuel	11.25
Pressure Feed Fuel System.....	11.2	Laboratory Testing.....	11.26
Complex Fuel Systems.....	11.3	Submodule 11 Practice Questions	11.27
Fuel Tanks	11.3	Submodule 11 Practice Answers	11.28
Generalities on Fuel Tanks	11.3	12.12 HYDRAULIC POWER (ATA 29).....	12.1
Fuel Tank Construction.....	11.4	System Layout	12.1
Integral Fuel Cells	11.4	Open Center Hydraulic Systems	12.1
Bladder Fuel Tanks	11.4	Closed Center Hydraulic Systems.....	12.2
Fuel Tank Repair.....	11.5	Evolution of Hydraulic Systems	12.2
Integral Tanks	11.5	Hydraulic Power Pack System	12.3
Bladder Tanks	11.5	Modern High Performance Systems	12.3
Supply Systems.....	11.5	Hydraulic Fluids	12.3
Fuel Feed	11.5	Hydraulic Fluid Properties	12.3
Non-Pressurized Fuel Systems	11.5	Viscosity	12.3
Pressurized Fuel Systems.....	11.6	Chemical Stability	12.3
Lines And Fittings.....	11.7	Flash Point	12.4
Fuel Valves	11.8	Fire Point	12.4
Generalities on Fuel Valves	11.8	Types of Hydraulic Fluids	12.4
Manual Valves	11.8	Mineral Base Fluids.....	12.4
Motor Operated Valves	11.8	Polyalphaolefin Base Fluids.....	12.4
Solenoid Operated Valves	11.9	Phosphate Ester Base Fluids	12.4
Fire Shut Off Valves.....	11.9	Intermixing of Fluids.....	12.4
Fuel Pumps	11.10	Compatibility With Aircraft Materials.....	12.5

TABLE OF CONTENTS

Hydraulic Reservoirs and Accumulators	12.5	Power Distribution	12.25
Reservoirs	12.5	Shutoff Valves	12.25
Non Pressurized Reservoirs	12.5	Selector Valves	12.25
Pressurized Reservoirs	12.5	Check Valves	12.27
Air Pressurized Reservoirs	12.6	Orifice Type Check Valve	12.27
Fluid Pressurized Reservoirs	12.7	Sequence Valves	12.28
Reservoir Servicing	12.8	Pressure Controlled Sequence Valve	12.28
Accumulators	12.8	Mechanically Operated Sequence Valve	12.28
Types of Accumulators	12.8	Priority Valves	12.29
Spherical	12.8	Shuttle Valves	12.29
Cylindrical	12.9	Quick Disconnect Valves	12.29
Maintenance of Accumulators	12.9	Hydraulic Fuses	12.29
Heat Exchangers	12.10	Hydraulic Actuators	12.30
Pressure Generation: Electric, Mechanical, and Pneumatic	12.10	Linear Actuators	12.30
Mechanical, Electrical, and Pneumatic Driven Pumps	12.10	Rotary Actuators	12.31
Hand Pumps	12.10	Indication and Warning Systems	12.31
Single Action Hand Pumps	12.10	Interface With Other Systems	12.32
Double Action Hand Pumps	12.10	Servicing	12.33
Rotary Action Hand Pumps	12.11	Hydraulic Fluid Contamination	12.33
Classification of Pumps	12.11	Contamination Prevention	12.33
Constant Displacement Pumps	12.11	Fluid Monitoring	12.33
Gear Type Power Pump	12.11	Fluid Compatibility	12.33
Gerotor Pump	12.12	Hydraulic System Maintenance & Troubleshooting	
Piston Pumps	12.12	Checklist	12.33
Bent Axis Piston Pump	12.13	Submodule 12 Practice Questions	12.35
Inline Piston Pump	12.13	Submodule 12 Practice Answers	12.36
Vane Pump	12.14		
Variable Displacement Pumps	12.14	12.13 ICE AND RAIN PROTECTION (ATA 30).....	13.1
Basic Pumping Operation	12.14	Ice Formation, Classification and Detection	13.1
Normal Pumping Mode	12.15	Types of Aircraft Ice	13.1
Depressurized Mode	12.15	Clear Ice	13.1
Hydraulic Seals	12.16	Rime Ice	13.1
Packings	12.17	Gleam Ice	13.2
V-Rings	12.17	Hoarfrost	13.2
U-Ring	12.17	Icing Effects	13.2
O-Rings	12.17	Ice Detection	13.2
Gaskets	12.19	Pressure Ice Detectors	13.2
Wipers	12.19	Vibrating Ice Detectors	13.3
Emergency Pressure Generation	12.19	Hot Rod Ice Detector	13.3
Hydraulic Motors	12.20	Serrated Rotor Ice Detector Head	13.3
Power Transfer Units (PTUs)	12.20	Anti-Icing and De-Icing Systems: Electrical, Hot Air	
Hydraulic Motor Driven Generators	12.20	and Chemical	13.4
System Contamination and Filters	12.20	Thermal Anti-Ice Systems	13.4
Hydraulic Fluid Contamination	12.20	Thermal Engine Anti-Ice (EAI)	13.4
Contamination Check	12.21	Electrical Anti-Ice Systems	13.5
Hydraulic Sampling Schedule	12.21	Mechanical De-Icing Systems	13.6
Contamination Control	12.22	Chemical Anti-Ice Systems	13.6
Hydraulic System Flushing	12.22	Ground Chemical De-Icing	13.6
Filters	12.22	De-Icing Fluids	13.6
Micron Filters	12.23	De-Icing Procedures	13.6
Maintenance of Filters	12.23	Windshield Anti-Icing	13.8
Filter Differential Pressure Indicators	12.23	Windshield Hot Air De-Ice/De-Fog	13.8
Pressure Control	12.24	Rain Repellent and Removal	13.8
Pressure Relief Valves	12.24	Chemical Rain Repellent	13.8
Pressure Regulators	12.24	Hydrophobic Coatings	13.9
Pressure Reducers	12.25	Pneumatic Rain Removal Systems	13.9

TABLE OF CONTENTS

Probe and Drain Heating	13.10	Hydraulic System Components	14.13
Thermal Electric Anti-Icing	13.10	Selector Valves	14.13
Probe Anti-Ice	13.10	Safety Locks	14.13
Drain Anti-Ice	13.10	Downlock And Uplock Mechanisms	14.14
Wiper Systems	13.10	Ground Locks	14.15
Mechanical Wiper Systems	13.11	Sequence Valves	14.15
Wash/Wipe Systems	13.11	Actuators	14.15
Submodule 13 Practice Questions	13.13	Electric Extension and Retraction Systems	14.15
Submodule 13 Practice Answers	13.14	Electric/Hydraulic Extension and Retraction Systems	14.15
		Pneumatic Extension and Retraction Systems	14.15
12.14 LANDING GEAR (ATA 32)	14.1	Normal Extension	14.16
Landing Gear Construction and Shock Absorbing	14.1	Emergency Extension Systems	14.18
Skid Gears	14.1	Mechanical Emergency Extension Systems	14.18
Floats	14.2	Hydraulic Emergency Extension Systems	14.18
Wheels	14.2	Landing Gear Retraction Test	14.19
Tail Wheel Type	14.2	Section B	14.21
Tricycle Nose Wheel Type	14.2	Indications and Warnings	14.21
Quadricycle Type	14.3	Safety Switches	14.22
Classification of Landing Gear	14.3	Squat Switches, Proximity Sensors	14.22
Non-Articulated or Telescopic Type	14.3	Wheels, Tires, Brakes	14.23
Articulated or Levered Suspension Type	14.3	Wheels	14.23
Four-Bar Linkage Mechanism	14.4	Wheel Construction	14.24
Wheelbase	14.4	Inboard Wheel Half	14.24
Wheel Track	14.4	Outboard Wheel Half	14.24
Semi-Articulated or Semi-Levered Suspension Type	14.4	On Aircraft Wheel Inspection	14.25
Fixed and Retractable Landing Gear	14.4	Proper Installation	14.25
Landing Gear Attachment	14.4	Axle Nut Torque	14.26
Landing Gear Elements	14.5	Off Aircraft Wheel Inspection	14.26
Main Landing Gear Elements	14.5	Disassembly of the Wheel	14.26
Shock Strut Assembly	14.6	Inspection of the Wheel Halves	14.26
Weight-On-Wheels Switch	14.6	Tie Bolt Inspection	14.26
Nose/Tail Landing Gear Elements	14.6	Key and Key Screw Inspection	14.27
Shock Strut Assembly	14.7	Fusible Plugs	14.27
Trailing Arm Assembly	14.7	Balance Weights	14.27
Fork and Axle Assembly	14.7	Cleaning Wheel Bearings	14.27
Centering Cams (Locating Cams)	14.7	Inspection of Wheel Bearings	14.27
Landing Gear Material	14.8	Lubrication of Bearings	14.28
Corrosion Protection	14.8	Tires and Tubes	14.28
Shock Absorbing	14.8	Tire Classification	14.28
Shock Struts	14.8	Ply Rating	14.28
Shock Strut Construction	14.8	Tube Type or Tubeless	14.28
Metering Pins	14.8	Bias Ply or Radial	14.28
Damping or Snubbing Devices	14.9	Tire Terminology	14.28
Axles	14.9	Bead	14.29
Valve Fitting Assembly	14.9	Carcass Plies	14.29
Torque Links	14.10	Tread	14.29
Nose Gear Shock Struts	14.10	Sidewall	14.30
Tail Bumper Assembly	14.10	Helicopters Tire Types	14.30
Jacking Points and Towing Lugs	14.10	Tire Inspection	14.30
Shock Strut Instruction Plate	14.10	Inflation	14.30
Shock Strut Operation	14.10	Tread Condition	14.30
Servicing Valves	14.11	Tread Damage	14.30
Servicing Shock Struts	14.11	Sidewall Condition	14.33
Bleeding Shock Struts	14.12	Tire Storage	14.33
Extension/Retraction Systems: Normal and Emergency	14.13	Tubes	14.34
Hydraulic Extension and Retraction Systems	14.13	Tube Construction and Selection	14.34

TABLE OF CONTENTS

Tube Storage and Inspection	14.34	Submodule 14 Practice Questions	14.55
Tire Mounting	14.34	Submodule 14 Practice Answers	14.56
Tube Type Tires	14.35		
Tire Balancing	14.36	12.15 LIGHTS (ATA 33)	15.1
Brakes	14.36	Light Sources	15.1
Types and Construction of Helicopter Brakes	14.36	High Intensity Discharge Bulbs (HID)	15.1
Single Disc Brakes	14.36	HID Precautions	15.1
Floating Disc Brakes	14.37	Light Emitting Diodes (LED)	15.2
Fixed Disc Brakes	14.37	Xenon Flash Tubes	15.2
Dual Disc Brakes	14.39	External: Navigation, Landing, Taxiing, Ice	15.2
Multiple Disc Brakes	14.39	Navigation/Position Lights	15.3
Carbon Brakes	14.39	Anti-Collision Lights	15.3
Electric Carbon Brakes	14.40	Rotating Beacons	15.4
Brake Actuating Systems	14.40	Strobe Lighting	15.4
Independent Master Cylinders	14.40	Landing Lights	15.4
Boosted Brakes	14.41	Taxi Lights	15.4
Brake Metering Valve, Hydraulic and Pressure Transducers	14.41	Ice Inspection Lights	15.5
Parking Brakes	14.42	Internal: Cabin, Cockpit, Cargo	15.6
Emergency Brakes	14.43	Fluorescent Lights	15.6
Brake Inspection and Service	14.43	Fluorescent Lamp Operating Circuit	15.6
On Aircraft Servicing	14.43	Flight Deck Lighting	15.6
Lining Wear	14.43	Integral Instrument Lighting	15.6
Air in the System	14.44	Cabin Lighting	15.7
Fluid Quantity and Type	14.45	Cargo and Baggage Compartments Lights	15.7
Inspection for Leaks	14.45	Emergency Lighting	15.7
Proper Bolt Torque	14.45	Electroluminescence	15.8
Off-Aircraft Brake Servicing and Maintenance	14.45	Self Illuminating Signs	15.8
Bolt and Threaded Connections	14.45	Floor Mounted Escape Path Lighting	15.8
Discs	14.46	Emergency Exit Lighting Activation	15.8
Automatic Adjuster Pins	14.46	Submodule 15 Practice Questions	15.9
Torque Tube	14.46	Submodule 15 Practice Answers	15.10
Brake Housing and Piston Condition	14.46		
Seal Condition	14.46	12.16 (RESERVED)	16.1
Brake Malfunctions and Damage	14.46	This submodule is reserved by EASA for future use.	16.1
Overheating	14.46		
Dragging	14.47	12.17 INTEGRATED MODULAR AVIONICS (IMA) (ATA 42)	17.1
Chattering or Squealing	14.47	Integration of Avionics	17.1
Steering	14.47	Digital Data Bus Use Reduces Wiring	17.2
Nose Wheel Steering	14.47	Core Systems	17.3
Shimmy Dampers	14.47	Common Core Systems Concepts	17.3
Piston Type	14.48	Core Processor Input/Output Module (CPIOM)	17.4
Vane Type	14.48	Network Components	17.4
Non-Hydraulic Shimmy Damper	14.48	Data Transmission on the Network	17.4
Landing Gear System Maintenance	14.48	AFDX Switch	17.4
Landing Gear Rigging and Adjustment	14.49	AFDX Switch Software	17.4
Adjusting Landing Gear Latches	14.49	Submodule 17 Practice Questions	17.7
Drag and Side Brace Adjustment	14.49	Submodule 17 Practice Answers	17.8
Air-Ground Sensing	14.50		
Skids and Floats	14.51	12.18 ONBOARD MAINTENANCE SYSTEMS (ATA 45)	18.1
Skids	14.51	Central Maintenance Computers	18.1
Skids and Shock Absorbers	14.52	Built-In Test Equipment (BITE)	18.3
Skid Dampeners	14.52	Data Loading Systems	18.4
Skid and Wheels	14.53	Electronic Library System	18.4
Floats	14.53	Submodule 18 Practice Questions	18.5
Fixed Utility Floats	14.53	Submodule 18 Practice Answers	18.6
Emergency Pop-Out Floats	14.53		

TABLE OF CONTENTS

12.19 INFORMATION SYSTEMS (ATA 46)..... 19.1

Adoption by the Helicopter Operators 19.1

Aircraft General Information Systems 19.1

The Airbus System..... 19.2

 Network Server System 19.2

 Secure Communication Interface 19.2

 Central Data Acquisition Module..... 19.2

 Data Loading and Configuration Systems 19.2

Flight Deck Information System..... 19.2

Maintenance Information System..... 19.2

 Electronic Logbooks 19.3

Passenger Cabin Information System 19.4

 Cabin Wireless Connectivity..... 19.4

 Leaky Line Antennas 19.4

 Wireless Media Streamer..... 19.4

Miscellaneous Information Systems 19.4

Submodule 19 Practice Questions..... 19.5

Submodule 19 Practice Answers 19.6

Acronym Definitions.....A.1





Figure 2-20. Advancing zone flapping movement.



Figure 2-21. Retreating zone flapping movement.

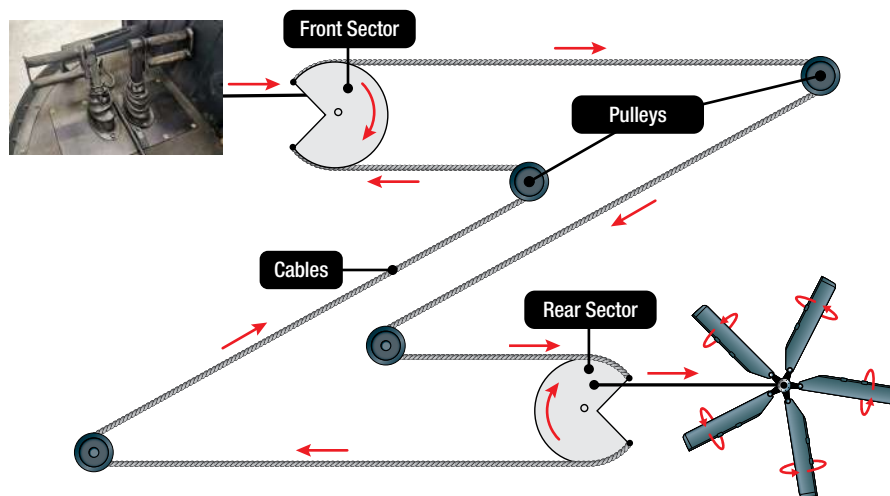


Figure 2-22. Yaw control system.

position of the spider and so changes the blade's angle of attack thus adjusting thrust. [Figure 2-23] This cable and pulley system has the additional advantage of being easy to check and repair in the event of damage. Another advantage is the lightness and flexibility of the system required for this task.

DIFFERENT SOLUTIONS

During translational flight, the tail rotor uses 20% of the power supplied by the motor. The remaining 80% is given to the main rotor. Different solutions are used to reduce the power consumption of the tail and restore maximum torque to the main rotor.

On a helicopter with two main rotors, known as a tandem configuration, the main rotors are located at each end of the helicopter and there is no tail rotor. The two main rotors spin in opposite directions, with each one counteracting the torque of the other. The Boeing CH-47 Chinook helicopter has this type of main rotor system. [Figure 2-24] Changes in yaw on this

helicopter are done with differential cyclic pitch, with the front rotor generating cyclic pitch in the direction the pilot wants the nose to move and the aft rotor generating the opposite cyclic pitch.

On helicopters with two main rotors, known as a coaxial configuration, the main rotors are located one above the other and driven by concentric drive shafts. The two main rotors spin in opposite directions, with each one counteracting the torque of the other. The Russian KA-32 helicopter in Figure 2-25 has this type of main rotor system. Changes in yaw on this helicopter are made by increasing the collective pitch of one of the main rotors and decreasing the collective pitch of the other, creating a dissymmetry of torque.

On helicopters with two main rotors that are side by side with separate shafts, such as the Kaman helicopter shown in Submodule 1 [Figure 1-7], opposite cyclic pitch on the two rotors is used to produce yaw movement.

THE FENESTRON SOLUTION

While the tail rotor is a highly effective solution, there are real dangers in its use. First, the spinning blades are deadly if someone steps into them. Second is the risk of hitting a tree or other object. If the tail rotor is lost, the helicopter becomes uncontrollable and a crash is inevitable. Aerodynamically, this is also a problem. When the helicopter is in forward flight and a vertical pylon is used to support the tail rotor head, [Figure 2-26] drag appears.



Figure 2-23. Cables-rear sector-rod and tail servo-control.



Figure 2-24. Tandem main rotor helicopter.



Figure 2-25. Helicopter with coaxial counter-rotating main rotors.

An alternative solution to the tail rotor, seen in Figure 2-26, is a type of anti-torque rotor known as a Fenestron, or fan-in-tail design as seen in Figure 2-27. Because the rotating blades in this design are enclosed in a shroud, they present less of a hazard to personnel on ground and they create less drag in flight. Another advantage is to simplify the tail rotor assembly, as inside the shroud, the problem of advancing and retreating blade disappears. This direct benefit allows the removal of the flapping hinge.

Another advantage of the Fenestron is weight. The blades are smaller and lighter than the classic blades, and in case of change the cost is cheaper. As stated before, the tail rotor robs the main rotor of a part of its power. With a Fenestron, the special shape of the tail pylon reduces the tail rotor's power consumption. This occurs during forward flight, as the dissymmetric vertical fin [Figure 2-28] creates its own lift to oppose the torque, similar to a wing but in vertical position. However, one negative aspect of a Fenestron is the whistling sound in the cabin due to the airflow into the shroud.



Figure 2-26. Aerospatiale Helicopter Tail Rotor.



Figure 2-27. Fenestron on a Eurocopter Model SA341 Gazelle.

THE BLEED AIR NOTAR SYSTEM

Another method of counteracting the torque of the main rotor is a technique called the no-tail-rotor system, or NOTAR. [Figure 2-29]

This system uses a high volume of air at low pressure, which is generated by a fan installed in the tail boom and driven by the helicopter's engine. The fan forces air into the boom, where a portion exits from slots on the right side of the boom and together with the main rotor downwash, creates a phenomenon called the Coanda effect. The air coming from the slots causes a higher velocity, and therefore lower pressure on that side of the boom. The higher pressure resulting on the left side of the boom partially counteracts the torque of the main rotor. [Figure 2-30]



Figure 2-28. Fenestron dissymmetric vertical fin.

The remainder of the air travels back to a controllable rotating nozzle in the helicopter tail. The air exits the nozzle at a high velocity and creates thrust which additionally counteracts the torque of the main rotor. In a hover this force on the left side of the boom counteracts up to 60% of the main rotor torque, with the remainder being controlled by thrust from the nozzle.

The NOTAR anti-torque system eliminates some of the mechanical problems of a tail rotor, including long driveshafts, suspension bearings, mid-gearboxes, and 90° gearboxes. It is safer for the mechanic due to the absence of rotating tail blades, and in flight, the reduction of drag allows for less stress on the structure and reduced fuel consumption. A final advantage, unlike the Fenestron, is that the NOTAR system is quieter.

MAIN ROTOR HEAD: DESIGN AND OPERATION FEATURES

The rotor system on a helicopter consists of a mast, hub, and rotor blades. The mast is a hollow cylindrical metal shaft which extends upwards from and is driven, (and sometimes supported) by the transmission. At the top of the mast is the attachment



Figure 2-29. MD-520 helicopter with no tail rotor.

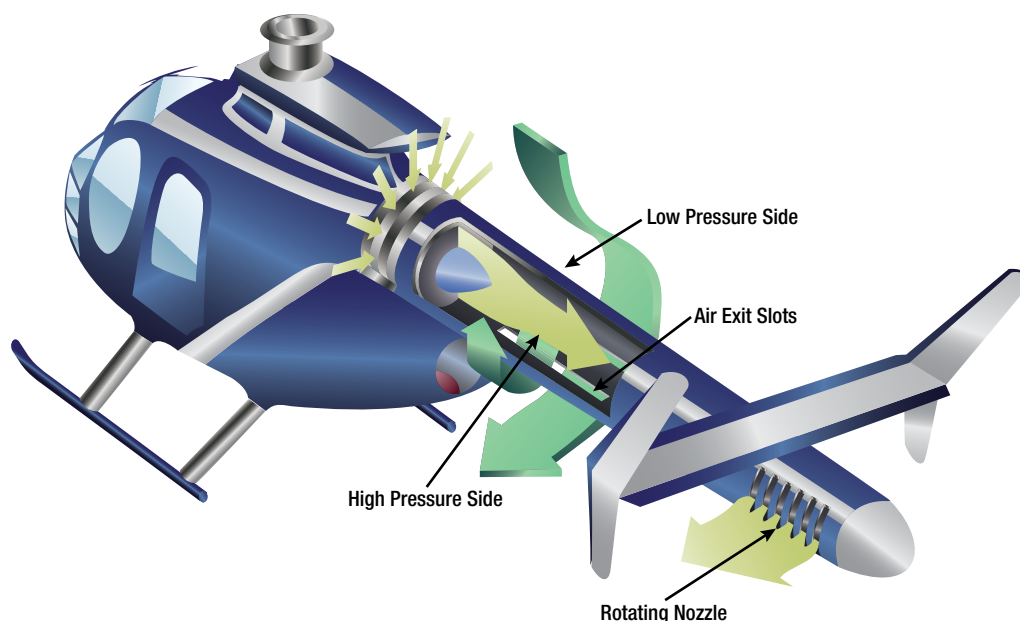


Figure 2-30. Airflow from a variable pitch fan on a NOTAR helicopter.

point for the rotor blades called the hub. The rotor blades are then attached to the hub by a variety of different methods. The blades need three free movements to withstand the various stresses and to control the flight direction. [Figure 2-31]

The flapping hinge prevents the helicopter from tilting due to the dissymmetry of lift in the advancing and retreating zone of translational flight. The drag hinge withstands the lead/lag movement due to the Coriolis effect. [Figure 2-32] The feathering hinge permits changes to the angle of attack to change the direction of the lift.

Main rotor systems are classified according to how the main rotor blades are attached and move relative to the main rotor hub. There are three basic classifications: fully articulated, semi-rigid and rigid. Some modern rotor systems, such as the bearingless rotor system, use a combination of these types.

FULLY ARTICULATED ROTOR SYSTEMS

Fully articulated systems allow each blade to lead/lag (move back and forth in a plane), to flap (move up and down about an inboard hinge) independently of the other blades, and to feather, or rotate about the pitch axis to change lift. (The term feather should not be confused with the concept of feather as it applies to constant speed propellers.) Each of these blade motions are

related to the others. The three hinges are mechanical assemblies with bearings and lubrication. In Figure 2-33, the drag hinge and the flapping hinge are lubricated with oil by gravity, and a pipe is connected to the feathering hinge to lubricate it.

As the rotor spins, each blade responds to inputs from the collective and cyclic controls. The center of lift on the whole system moves in response to these inputs to effect pitch, roll, and upward motion.

As the lift on a given blade increases, it tends to flap upwards. The flapping hinge for the blade permits this motion and is balanced by the centrifugal force acting on the blade which tries to keep it in the horizontal plane. Under the flapping hinge, Figure 2-34, a mechanical stop is installed to avoid letting the blade rise too high and have uncorrectable loss of lift. At the same time, a lower stop protects the helicopter structure from impact in case the blade's flight would become too low.

Either way, some motion must be allowed. The centrifugal force is nominally constant; however, the flapping force is affected by the severity of in flight maneuvering (rate of climb, forward speed, aircraft gross weight, G forces). As the blade flaps, its center of

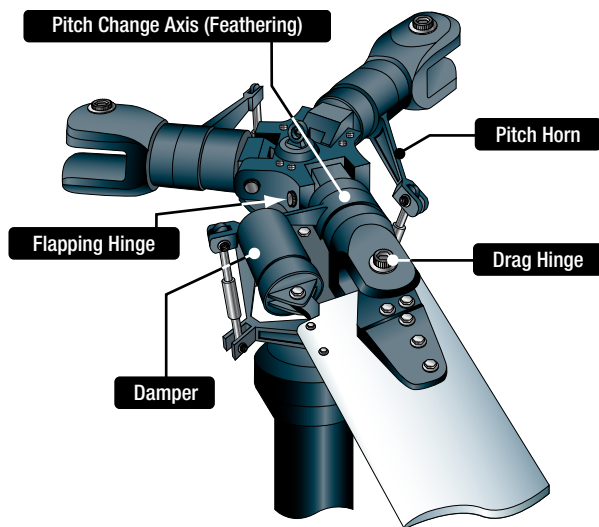


Figure 2-31. Flapping hinge allows up and down blade movement.

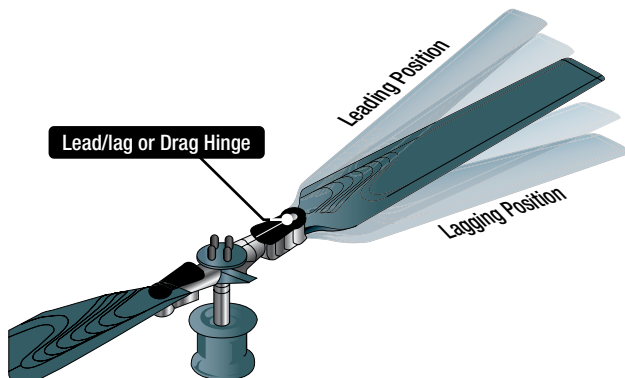


Figure 2-32. Lead-lag hinge allows fore and aft blade movement.



Figure 2-33. Fully Articulated Main Rotor System.



Figure 2-34. Flap stops.

gravity changes. This changes the local inertia of the blade with respect to the rotor system. It speeds up or slows down with respect to the rest of the blades and with the whole rotor system. This is accommodated by the lead/lag or a drag hinge, shown in **Figure 2-32**. The blade trying to speed up or slow down can best be understood by thinking about an ice skater performing a spin. As the skater moves their arms in, they spin faster because the inertia changes, but the total energy remains constant. Conversely, as they extend their arms the spin slows down. This is also known as conservation of angular momentum. An in-plane damper [**Figure 2-35**] controls how quickly the lead/lag motion can occur.

Older hinge designs relied on conventional metal bearings. By basic geometry, this precludes a single hinge from being able to handle both flapping and lead/lag movement and is cause for recurring maintenance. Newer rotor systems use elastomeric bearings, which are arrangements of rubber and steel that can permit motion in two axes. This allows two metal bearings to



Figure 2-35. Drag hydraulic damper on SA330 puma.

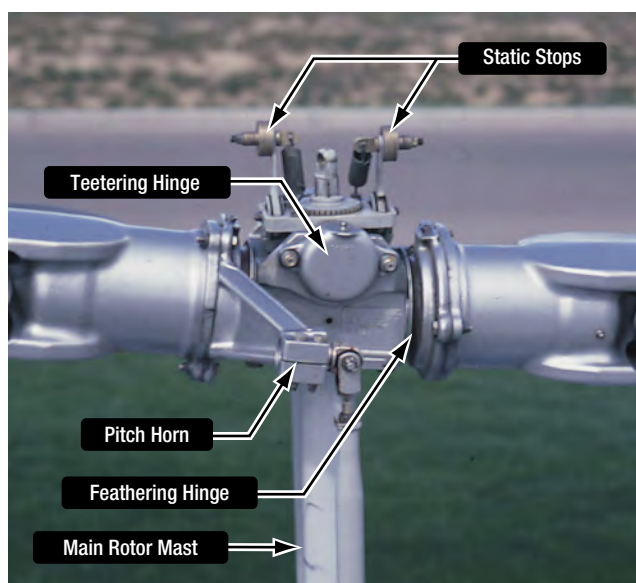


Figure 2-36. Teetering hinge for hub tilt and feathering hinge for pitch change.

be replaced by a single bearing. The new hinge design requires less maintenance, is easier to inspect, and its wear is gradual and more visible. The metal-to-metal contact of older bearings and the need for lubrication is thus eliminated.

SEMI-RIGID ROTOR SYSTEMS

A semi-rigid rotor system is usually composed of two blades that are rigidly mounted to the main rotor hub. The main rotor hub is free to tilt with respect to the main rotor shaft on what is known as a teetering hinge. This allows the blades to flap together as a unit. As one blade flaps up, the other flaps down. Since there is no vertical drag hinge, lead/lag forces are absorbed and mitigated by the blade bending. The semi-rigid rotor is also capable of feathering, which is made possible by a feathering hinge. [**Figure 2-36**]

The underslung rotor system mitigates the lead/lag forces by mounting the blades slightly lower than the usual plane of rotation, so the lead and lag forces are minimized. As the blades flap upward with increased lift, the centers of pressure of the blades are almost in the same plane as the hub. Whatever stresses are remaining bend the blades for compliance.

If the semi-rigid system is an underslung rotor, the Center of Gravity (CG) is below where it is attached to the mast. This underslung mounting is designed to align the blade's center of mass with a common flapping hinge so that both blade's centers of mass vary equally in distance from the center of rotation during flapping. The rotational speed of the system tends to change, but this is restrained by the inertia of the engine and flexibility of the drive system. Only a moderate amount of stiffening at the blade root is necessary to handle this restriction. Simply put, underslugging effectively eliminates geometric imbalance. **Figure 2-37** shows how the centerline of the blades falls below the teetering hinge.

Helicopters with semi-rigid rotors are vulnerable to a condition known as mast bumping which can cause the rotor flap stops to shear the mast. The static stops can be seen in **Figure 2-36**. The mechanical design of the semi-rigid system requires some physical limit to downward flapping of the blades. Mast bumping is the result of excessive rotor flapping. Each rotor system design has a maximum flapping angle. If flapping exceeds the design value, a static stop will contact the mast. It is the violent contact between the static stop and the mast during flight that causes mast damage or separation. This contact must be avoided at all

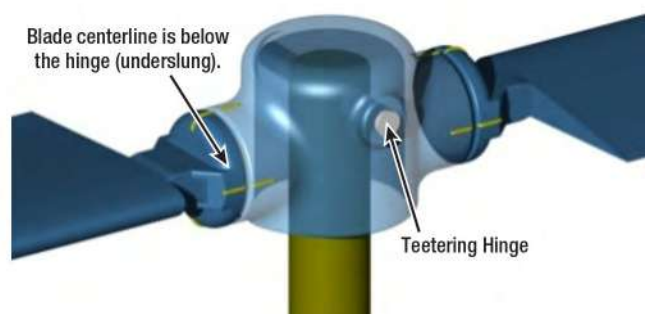


Figure 2-37. Semirigid rotor with underslung design.