

AVIATION MAINTENANCE TECHNICIAN CERTIFICATION SERIES

GAS TURBINE ENGINE


15



EASA 2023-889 COMPLIANT

The publishers of this Aviation Maintenance Technician Certification Series welcome you to the world of aviation maintenance. For additional educational tools created to prepare candidates for licensure, contact Aircraft Technical Book Company. We wish you good luck and success in your studies and in your aviation career!

EASA CAT-A TEXTBOOKS ARE AVAILABLE IN EBOOK DOWNLOAD, OR ONLINE READER

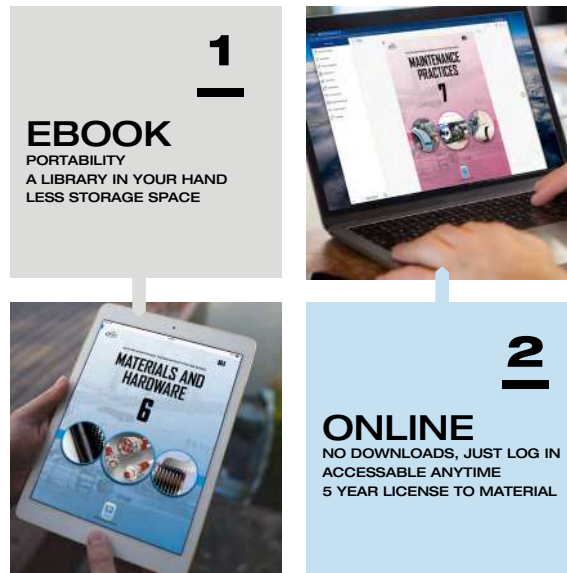

Special thanks to our instructors, contributors, and authors

Author - Peter A. Vosbury

Contributor - Richard D. Brauhn II

Layout and Design by Michael Amrine

VERSION	EFFECTIVE DATE
002	2024.11

Copyright © 2016, 2024 — Aircraft Technical Book Company. All Rights Reserved.

No part of this publication may be reproduced, stored in a retrieval system, transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the publisher.

To order books or for customer service, please call +1 (970) 726-5111, or visit us online at www.actechbooks.com



Update notices for this book will be available online at www.actechbooks.com/revisions.html
If you would like to be notified when changes occur, please join our mailing list at www.actechbooks.com

VERSION	EFFECTIVE DATE	DESCRIPTION OF REVISION(S)
001	2016.01	Module creation and release.
001.1	2022.06	Inclusion of Measurement Standards for clarification, page iv. Minor appearance and format updates.
002	2024.11	Regulatory update for EASA 2023-989 compliance.

Module was reorganized based upon the EASA 2023-989 subject criteria. Enhancements included in this version 005 are:

- 15.1 *Geared turbofan engines* - topic added.
- 15.3 *Turboprop and Turboshaft Engine Inlets* - topic added.
- 15.4 *Multispool designs* - topic added.
- 15.4 *Axial compressor blades, vanes, tips, and roots* - topic added.
- 15.4 *Compressor Rotor; drum, disk, and blisk types* - topic added.
- 15.4 *Combination compressors* - topic added.
- 15.4 *Compressor anti-stall bleed system* - topic added.
- 15.6 *Counter rotating turbines* - topic added.
- 15.8 *Labyrinth Seals* - topic added.
- 15.9 *Alternative and drop-in fuel* - topic added.
- 15.11 *Electronic power augmentation* - topic added.
- 15.13 *Large engine starter generators* - topic added.
- 15.13 *FADEC ignition system on GE CFM 56* - topic added.
- 15.15 *Power Augmentation* - replaced with alternative turbine construction.
- All Submodule questions/answers updated.
- Additional author and format enhancements.

TABLE OF CONTENTS

GAS TURBINE ENGINE

Revision Log	iii
Measurement Standards	iv
Basic Knowledge Requirements	v
Part 66 Basic Knowledge Requirements	vi
Table of Contents	ix

15.1 FUNDAMENTALS..... 1.1

Turbine Engine Fundamentals	1.1
Energy	1.1
Potential Energy	1.1
Kinetic Energy	1.2
Newton's Laws of Motion	1.2
Newton's First Law	1.2
Newton's Second Law	1.2
Newton's Third Law	1.2
Bernoulli's Principle	1.2
Boyle's & Charles' Law	1.3
The Brayton Cycle	1.3
Force, Work, Power, Energy	1.4
Force	1.4
Work	1.4
Power	1.4
Energy	1.4
Speed and Velocity	1.5
Acceleration	1.5
Fundamentals of Operation	1.5
Power	1.5
Fuel Economy	1.6
Durability and Reliability	1.6
Operating Flexibility	1.6
Compactness	1.6
Constructional Arrangement	1.6
Turbojet	1.6
Turbofan Engines	1.8
Geared Turbofan Engines	1.8
Geared Turbofan Gearbox	1.8
Turboshaft	1.8
Turboprop	1.9
Submodule 1 Practice Questions	1.11
Submodule 1 Practice Answers	1.12

15.2 ENGINE PERFORMANCE..... 2.1

This submodule not required for CAT-A certification.....	2.1
--	-----

15.3 INLETS..... 3.1

Compressor Inlet Ducts	3.1
Inlet Configurations	3.1
Subsonic Flight Inlets	3.1
Turbofan Engine Inlet Sections	3.2
Turboprop Inlets	3.3
Turboshaft Inlets	3.3
Supersonic Flight Inlet Ducts	3.4
Variable Geometry Ducts	3.4
Bellmouth Compressor Inlets	3.4
Compressor Inlet Screens	3.5

Ice Protection	3.6
System Operation	3.6
Regulator Valve	3.6
Anti-icing with Electronic Engine Control and FADEC	3.6
Electrothermal Anti-icing Systems	3.8
Troubleshooting the Anti-icing System	3.8
Submodule 3 Practice Questions	3.9
Submodule 3 Practice Answers	3.10

15.4 COMPRESSORS..... 4.1

Compressor Section	4.1
Bleed Air	4.1
Construction Features, Operating Principles, and Applications	4.1
Centrifugal Flow Compressor	4.1
Axial Flow Compressors	4.2
Blades and Vanes	4.3
Tips and Roots	4.3
Compressor Rotor – Drum, Disk, or Blisk Type	4.3
Centrifugal and Axial Advantages and Disadvantages	4.3
Fan Balance	4.4
Operation	4.4
Cause and Effect of Compressor Stall	4.5
Methods of Airflow Control	4.5
Variable Angle Compressor Stator Vanes	4.6
Bleed Valves	4.6
Compressor Ratio	4.6
Submodule 4 Practice Questions	4.7
Submodule 4 Practice Answers	4.8

15.5 COMBUSTION SECTION..... 5.1

Constructional Features	5.1
Can Type Combustion Chamber	5.2
Can-Annular Combustion Chamber	5.2
Annular Combustion Chamber (Through Flow)	5.2
Annular Reverse Flow Combustor	5.2
Operation of Combustion Chambers	5.4
Combustion Chamber Performance	5.4
Combustion Flameout	5.4
Submodule 5 Practice Questions	5.5
Submodule 5 Practice Answers	5.6

15.6 TURBINE SECTION..... 6.1

Operation and Characteristics of Turbine Types	6.1
Turbine Types	6.1
Axial Flow Turbine	6.1
Counter Rotating Turbines	6.2
Radial Inflow Turbine	6.2
Turbine Section Configuration	6.2
Turbine Stages	6.2
Turbine Housing	6.3
Turbine Blades	6.3
Impulse Configuration	6.3
Reaction Configuration	6.3
Impulse-Reaction Configuration	6.3
Turbine Blade Construction	6.3
Turbine Blade Tips	6.4

TABLE OF CONTENTS

Shrouds and Seals	6.4
Blade Clearance Control	6.5
Stators/Guide Vanes	6.6
Turbine Vane and Blade Cooling	6.7
Turbine Disk/Rotor	6.7
Blade to Disk Attachment	6.9
Turbine Blade Stress and Creep	6.9
Submodule 6 Practice Questions	6.11
Submodule 6 Practice Answers	6.12

15.7 EXHAUST 7.1

Construction and Principles of Operation	7.1
Exhaust Nozzle Shapes	7.2
Convergent Exhaust Nozzle	7.3
Convergent-Divergent Exhaust Nozzle	7.3
Variable Area Exhaust Nozzles	7.4
Engine Noise Suppression	7.4
Thrust Reverser's	7.5
Submodule 7 Practice Questions	7.9
Submodule 7 Practice Answers	7.10

15.8 BEARINGS AND SEALS 8.1

This submodule not required for CAT-A certification	8.1
---	-----

15.9 LUBRICANTS AND FUELS 9.1

Properties and Specifications of Turbine Engine Fuels	9.1
Standard Fuel	9.1
Turbine Fuel Types	9.1
Fuel Identification	9.1
Fuel Purity	9.1
Alternate Fuel and Drop-In Fuel	9.2
Properties and Specifications of Lubricants	9.3
Characteristics of Synthetic Lubricants	9.3
Synthetic Lubricants	9.3
Spectrometric Oil Analysis Programs	9.4
Fuel Additives	9.4
Anti-ice Additives	9.4
Anti-microbial Additives	9.4
Safety Precautions	9.4
Submodule 9 Practice Questions	9.5
Submodule 9 Practice Answers	9.6

15.10 LUBRICATION SYSTEMS 10.1

Lubrication System Components	10.1
Oil Tanks	10.1
Oil Pumps	10.2
Gear Pumps	10.2
Gerotor Pumps	10.3
Vane Pumps	10.3
Oil Filters	10.3
Filter Types	10.4
Filter Bypass Valves	10.4
Filter Pop-Out Warning	10.5
Lubrication System Valves	10.5
Oil Pressure Regulating Valve	10.5
Oil Pressure Relief Valve	10.5

Check Valves	10.5
Oil Jets	10.5
Breather Systems (Vents)	10.6
Rotary Air-Oil Separator	10.6
Oil Coolers	10.6
Air Oil Coolers	10.6
Fuel Oil Coolers	10.6
Scavenge Systems	10.7
Breather Pressurizing System	10.7
Magnetic Chip Detectors	10.7
Lubrication System Instrumentation	10.7
Wet Sump Systems	10.8
Accessory Section	10.8
Submodule 10 Practice Questions	10.9
Submodule 10 Practice Answers	10.10

15.11 FUEL SYSTEMS 11.1

General Requirements	11.1
Turbine Engine Fuel Metering Systems	11.1
Hydromechanical Fuel Controls	11.1
Hydropneumatic Fuel Controls	11.2
Hydromechanical/Electronic Fuel Controls	11.2
FADEC Fuel Control Systems	11.3
FADEC For An Auxiliary Power Unit	11.3
FADEC for Propulsive Engines	11.4
Fuel System Operation	11.4
Fuel System Layout and Components	11.5
Main Fuel Pumps (Engine Driven)	11.5
Fuel Heater	11.5
Fuel Filters	11.6
Fuel Spray Nozzles and Manifolds	11.7
Simplex Fuel Nozzle	11.7
Duplex Fuel Nozzle	11.7
Airblast Nozzles	11.7
Flow Dividers	11.7
Fuel Pressurizing Valves	11.8
Combustor Drain Valves	11.9
Fuel Quantity Indicating Units	11.9
Submodule 11 Practice Questions	11.11
Submodule 11 Practice Answers	11.12

15.12 AIR SYSTEMS 12.1

Turbine Engine Cooling	12.1
Zone Cooling	12.1
Compressor Cooling	12.2
Combustion Chamber Cooling	12.2
Turbine Section Cooling	12.2
Turbine Disk Cooling	12.2
Guide Vane and Blade Cooling	12.2
Accessory Cooling	12.3
Engine Compartment Ventilation and Cooling	12.3
Engine Bleed Air	12.3
Engine Anti-Icing Control	12.3
Submodule 12 Practice Questions	12.5
Submodule 12 Practice Answers	12.6

TABLE OF CONTENTS

15.13 STARTING AND IGNITION SYSTEMS.....	13.1	Gear Coupled Turbines	16.2
Turbine Engine Starters.	13.1	Reduction Gears	16.2
Electric Starting Systems and Starter Generator		Parallel Spur Gears	16.2
Starting Systems	13.1	Epicyclic Reduction Gears	16.2
Large Engine Starter Generators	13.2	Integrated Engine and Propeller Controls	16.2
Troubleshooting a Starter Generator Starting System	13.2	Control Levers.....	16.3
Air Turbine Starters.....	13.2	Single Lever Control	16.3
Starter-Fadec Interface.....	13.5	Dual Lever Controls	16.4
Air Turbine Troubleshooting Guide	13.5	Power Lever	16.4
Turbine Engine Ignition Systems	13.5	Propeller Lever.....	16.4
Capacitor Discharge Exciter Unit	13.6	Control Lock	16.4
Ignition System — FADEC Engine		Overspeed Safety Devices	16.4
(GE/SNECMA CFM 56).....	13.6	Automatic Drag Limiting System (Double Acting Propeller)	16.5
Power Supply	13.7	Propeller Overspeed Governor	16.5
Igniter Selection.....	13.7	Turbine Shaft Failure.....	16.5
Igniter Plugs.....	13.9	Submodule 16 Practice Questions.....	16.7
Ignition System Inspection and Maintenance.....	13.9	Submodule 16 Practice Answers	16.8
Inspection.....	13.9		
Check System Operation.....	13.9	15.17 TURBOSHAFT ENGINES.....	17.1
Removal, Maintenance and Installation of Ignition System		Arrangements	17.1
Components.....	13.9	Drive System	17.1
Ignition System Leads	13.9	Reduction Gearing	17.2
Igniter Plugs.....	13.10	Control Systems.....	17.2
Maintenance Safety Requirements	13.10	Submodule 17 Practice Questions.....	17.3
Starting System Safety Precautions.....	13.10	Submodule 17 Practice Answers	17.4
Ignition System Safety.....	13.10		
Submodule 13 Practice Questions.....	13.11	15.18 AUXILIARY POWER UNITS (APUS).....	18.1
Submodule 13 Practice Answers	13.12	Purpose	18.1
		Construction	18.1
15.14 ENGINE INDICATION SYSTEMS	14.1	Engine Systems	18.1
Gas Temperature Indicator	14.1	Flight Certified APU's	18.2
Exhaust Gas Temperature (EGT) Indicator.....	14.1	APU Control	18.3
Engine Pressure Ratio (EPR)	14.2	Crew Control and Monitoring	18.3
Oil Pressure and Temperature.....	14.2	Inspection and Servicing	18.3
Oil Pressure Indicator	14.2	Protective Systems	18.4
Oil Temperature Indicator.....	14.2	Submodule 18 Practice Questions.....	18.5
Fuel Pressure and Flow	14.2	Submodule 18 Practice Answers	18.6
Fuel Pressure Indication	14.2		
Fuel Flow Indicator	14.3	15.19 POWERPLANT INSTALLATION.....	19.1
Synchronous Mass Flow Meter.....	14.3	Powerplant Installations	19.1
Motorless Mass Flow Meter	14.3	Firewalls.....	19.1
Engine Speed.....	14.3	Cowlings	19.1
Vibration Monitoring	14.3	C Duct Cowls	19.1
Torque (Turboprop Engines).....	14.4	Acoustic Panels	19.1
Modern Turbofan Powered Airliner — Engine Instruments		Engine and Anti-Vibration Mounts	19.2
Display	14.4	Engine Mountings.....	19.2
Submodule 14 Practice Questions.....	14.7	Turbine Vibration Isolation Engine Mounts.....	19.2
Submodule 14 Practice Answers	14.8	Hoses and Pipes.....	19.3
		Fuel Lines	19.3
15.15 ALTERNATE TURBINE CONSTRUCTIONS.....	15.1	Hydraulic Lines	19.4
This submodule not required for CAT-A certification.....	15.1	O-Ring Seals.....	19.5
		Feeders, Connectors and Wiring Looms	19.5
15.16 TURBOPROP ENGINES.....	16.1	Control Cables and Rods.....	19.6
Introduction	16.1	Lifting Points.....	19.6
Gas (Free Turbine) and Gear Coupled Engines	16.1	Drains	19.7
Gas Coupled (Free Turbine)	16.1	Submodule 19 Practice Questions.....	19.9

TABLE OF CONTENTS

Submodule 19 Practice Answers	19.10
-------------------------------------	-------

15.20 FIRE PROTECTION SYSTEMS.....1

Fire Protection Systems	1
Components	1
Engine Fire Detection Systems	1
Thermal Switch Systems	1
Thermocouple Systems	2
Optical Fire Detection Systems	2
Infrared Optical Fire Protection	2
Pneumatic Thermal Fire Detection	2
Continuous Loop Detector Systems	2
Fenwal Continuous loop System	2
Kidde Continuous loop System	3
System Test	3
Dual Loop Systems	3
Support Tube Mounted Sensing Elements	3
Fire Detection Control Unit (Fire Detection Card)	4
Fire Zones	4
Engine Fire Extinguishing System	4
Fire Extinguishing Agents	4
Turbine Engine Ground Fire Protection	5
Containers	5
Discharge Valves	5
Pressure Indication	5
Two Way Check Valve	6
Red Disk Thermal Indicator	6
Yellow Disk Discharge Indicator	6
Fire Switches	6
Warning Systems	7
APU Fire Detection System	7
APU Fire Warning	7
Fire Bottle Discharge	8
Submodule 20 Practice Questions	9
Submodule 20 Practice Answers	10

15.21 ENGINE MONITORING AND GROUND OPERATION.....21.1

Procedures for Starting and Ground Run-up	21.1
Turbine Engine Operation	21.1
Ground Operation Engine Fire	21.1
Engine Checks	21.1
Checking Takeoff Thrust	21.2
Engine Shutdown	21.2
Turboprop Operation	21.2
Interpretation of Power Output and Parameters	21.2
Interpretation for Turboprop Engines	21.2
Health and Trend Monitoring	21.2
In-flight Recorders	21.2
Ground Indicators	21.2
Magnetic Plugs or Chip Detectors	21.2
Oil Debris Monitoring	21.2
Oil Filters	21.2
Spectrometric Oil Analysis Program	21.4
Vibration Monitoring	21.4
Borescope	21.4
Inspection of Engines and Components	21.4

Compressor Section	21.4
Inspection and Cleaning	21.6
Causes of Blade Damage	21.6
Blending and Replacement	21.8
Combustion Section Inspection	21.8
Marking Materials for Combustion Section Parts	21.9
Inspection and Repair of Combustion Chambers	21.9
Fuel Nozzle and Support Assemblies	21.9
Turbine Section	21.9
Turbine Disk Inspection	21.9
Turbine Blade Inspection	21.9
Turbine Blade Replacement	21.10
Turbine Nozzle Inlet Guide Vane Inspection	21.10
Clearances	21.10
Exhaust Section	21.10
Engine Accessories	21.10
Compressor Washing	21.11
Foreign Object Damage (FOD)	21.12
Submodule 21 Practice Questions	21.13
Submodule 21 Practice Answers	21.14

15.22 ENGINE STORAGE AND PRESERVATION22.1

This submodule not required for CAT-A certification	22.1
---	------

Acronym Definitions	A.1
---------------------------	-----



SUBMODULE KNOWLEDGE DESCRIPTIONS

LEVEL

SUBMODULE KNOWLEDGE DESCRIPTIONS		LEVEL
		A1
15.3	Inlet — Compressor inlet ducts; — Effects of various inlet configurations; — Ice protection.	2

15.3 INLETS

COMPRESSOR INLET DUCTS

The inlet duct of a turbine engine must furnish a uniform supply of air to the compressor for the engine to enjoy stall free compressor performance. The inlet duct must also create as little drag as possible. Even a small discontinuity of airflow can cause significant efficiency loss, as well as many other engine performance problems. To ensure that the flight inlet duct delivers air with minimum turbulence, it must be maintained in as close to new condition as possible. If repairs to this component are necessary, expertly installed flush patches are mandatory to prevent drag. Moreover, the use of an inlet cover should be used to promote cleanliness and to prevent corrosion and abrasion. A typical turbofan inlet can be seen in **Figure 3-1**.

Proper inlet design contributes materially to aircraft performance by increasing the ratio of compressor discharge pressure to duct inlet pressure. This is also referred to as the compressor pressure ratio. This ratio is the outlet pressure divided by the inlet pressure. The amount of air passing through the engine is dependent upon three factors:

1. The compressor speed (rpm).
2. The forward speed of the aircraft.
3. The density of the ambient (surrounding) air.



Figure 3-1. Typical turbofan inlet.

INLET CONFIGURATIONS

SUBSONIC FLIGHT INLETS

Subsonic flight inlet ducts, such as those found on business and commercial jet aircraft, are of fixed geometry and have a divergent shape. A diverging duct progressively increases in diameter from front to back, as shown in **Figure 3-2**. This duct is sometimes referred to as an inlet diffuser because of its effect on pressure. Air enters the aerodynamically contoured inlet at ambient pressure and starts to diffuse, arriving at the compressor at a slightly increased static pressure. Usually, the air is permitted to diffuse (increase in static pressure) in the front portion of the duct and to progress at a fairly constant pressure past the engine inlet fairing to the compressor. In this manner, the engine receives its air with minimal turbulence and at a more uniform pressure.

As the aircraft approaches its desired cruising speed, the increased inlet pressure adds significantly to the mass airflow. At cruising speed, the compressor reaches its aerodynamic design point and produces its optimum compression and best fuel economy. At this point, the flight inlet, compressor, combustor, turbine, and tailpipe are designed to work in concert with each other. If any

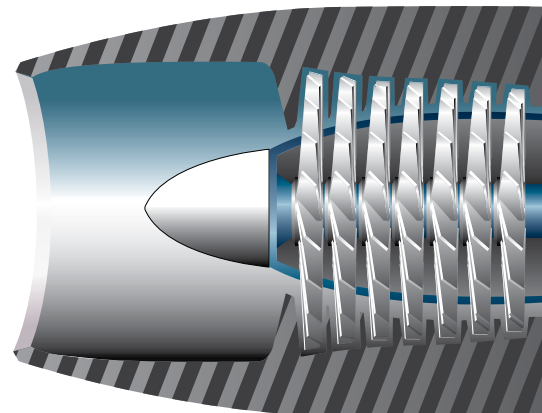


Figure 3-2. An inlet duct acts as a diffuser to decrease the airflow velocity and to increase the static pressure of air.

section does not match the others, for example because of damage, contamination, or ambient conditions, engine performance will be affected.

Figure 3-3 shows two common airflow arrangements. **Figure 3-3A** is a full duct design utilized on low and medium bypass engines, and **Figure 3-3B**, is the short duct design of a high bypass turbofan. The long ducting configuration reduces surface drag of the fan discharge air and enhances thrust. Many older engines did not take advantage of this drag reduction because of the excessive weight of the wider diameter and longer duct. However with new lightweight materials the newer generation engines can take advantage of this concept.

In *Submodule 2*, the concept of ram pressure recovery was mentioned. Ram compression occurs when the velocity of the air (kinetic energy) is converted to pressure (potential energy) due to the shape of the duct the air is flowing through. Because the subsonic inlet ducts for a turbojet or turbofan airplanes is diverging in shape, Bernoulli's principle teaches us that as the air spreads out the velocity will decrease and the static pressure will increase. A typical commercial airliner cruises at approximately Mach 0.85. That means the velocity of the air entering the inlet duct is Mach 0.85, which is much too fast to enter the engine's compressor. Because the ideal velocity to enter the compressor is Mach 0.5, the diverging shape of the inlet must slow the air down and as a result increases static pressure (ram compression).

Figure 3-4 shows the diverging shaped inlet duct for a high bypass turbofan engine, typical of what would be used in today's subsonic airliners. Noted in the figure is the fan duct flow area, with the arrow pointing at the fan exit guide vanes. The core inlet flow area is also shown, with the arrow pointing at the core inlet guide vanes. The fan exit guide vanes straighten the air before it goes out the fan duct, and the core inlet guide vanes direct the air into the compressor at the proper angle.

TURBOFAN ENGINE INLET SECTIONS

High bypass turbofan engines are usually constructed with the fan at the forward end of the compressor. A typical turbofan intake section is shown in **Figure 3-5**. Sometimes, the inlet cowl is bolted to the front of the engine and provides the airflow path into the engine. In dual compressor (dual spool) engines, the fan is integral with the relatively slow turning, low pressure compressor which allows the fan blades to rotate at low tip speeds for best fan efficiency. The fan permits the use of a conventional air inlet duct, resulting in low inlet duct loss. The fan reduces engine damage from ingested material because much of any material that is ingested is thrown radially outward and passes through the fan discharge rather than through the core of the engine. Warm bleed air is drawn from the engine and circulated on the inside of the inlet lip for anti-icing. The fan hub or spinner is either heated by warm air or is conical as mentioned earlier. Inside the inlet by the fan blade tips is an abradable rub strip that allows the fan blades to rub for short times due to flight path changes. **[Figure 3-6]** Also, inside the inlet are sound reducing materials to lower the noise generated by the fan.

The fan on high bypass engines consists of one stage of rotating blades and stationary vanes that can range in diameter from less than 84 inches (2.1 meters) to more than 112 inches (2.8 meters). **[Figure 3-7]** The fan blades are either hollow titanium or composite materials. The air accelerated by the outer part of the fan blades

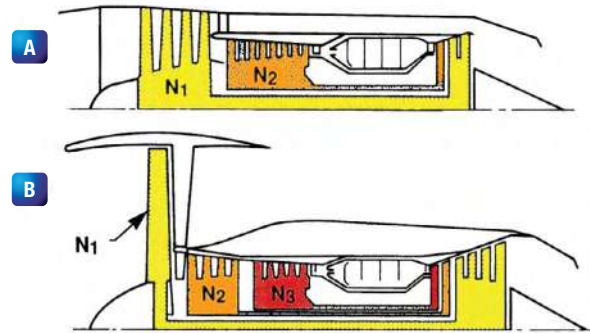


Figure 3-3. (A) Turbofan low- and medium-bypass ratio. (B) Turbofan high-bypass ratio.

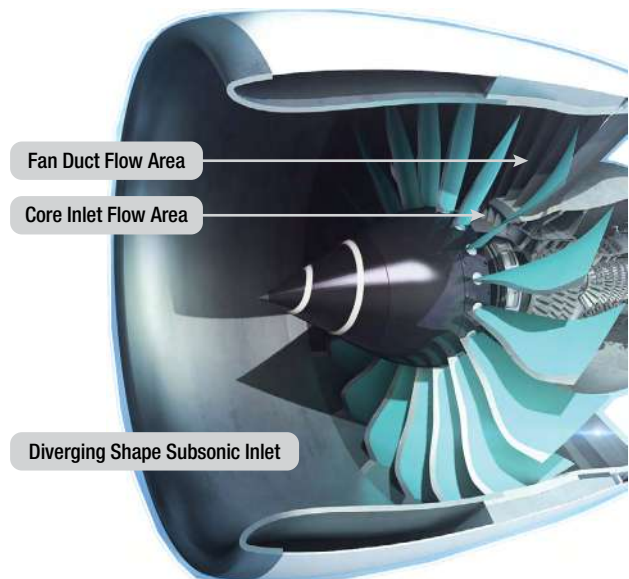


Figure 3-4. Diverging inlet for ultra-high-bypass turbofan.



Figure 3-5. A typical turbofan intake section.

forms a secondary airstream, which is ducted overboard without passing through the main engine. This secondary air (fan flow) produces 80 percent of the thrust in high bypass engines. The air that passes through the inner part of the fan blades becomes the primary airstream (core flow) through the engine itself. The air from the fan exhaust, which is ducted overboard, may be discharged in either of two ways:

- To the outside air through short ducts (dual exhaust nozzles) directly behind the fan. [Figure 3-8]
- All the way to the rear of the engine via closed ducts where it is exhausted to the outside air through a mixed exhaust nozzle. This type engine is called a ducted fan and the core airflow and fan airflow mix in a common exhaust nozzle.

TURBOPROP INLETS

Although a few turboprop airplanes have the propeller in the back and the engine inlet in the front, like the Piaggio Avanti seen in **Figure 3-9**, most have the propeller in the front and the engine inlet directly behind it. The engine inlet duct will have a diverging shape to it, and it will be able to convert velocity into pressure, but it will not be nearly as effective as the turbofan inlet duct in creating ram compression. However, because turboprop airplanes do not typically fly in the high subsonic velocity range (Mach 0.8 to 0.9), ram compression is not a primary consideration.

Some turboprop powered airplanes take off and land at non-improved grass, gravel and dirt airstrips. With this type of application, it is very important to have an inlet duct that separates debris from the air and does not allow it to enter the engine's compressor.

The Piaggio Avanti and the Turbo Ag-Cat airplanes are both powered by the Pratt & Whitney PT6 turboprop engine, but as **Figures 3-9 and 3-10** clearly show, their inlet ducts are completely different. On most airplanes the PT6 engine sits backward in the airframe, with the inlet in the rear and the exhaust in the front. For the inlet air to enter the engine's compressor, it must make a 90 degree turn to pass through the inlet screen and then another 90 degree turn to enter the rotating blades. Because the PT6 is a low mass airflow engine, the air is able to make these turns without too much loss of energy. The layout of the PT6 turboprop is shown in **Figure 3-11**.

The configuration for the inlet duct on the Turbo Ag-Cat would be like that shown in **Figure 3-12**. The air enters the inlet from the bottom after passing through the propeller, and then passes by a movable deflector vane that forces the air downward. Any debris in the air is forced downward and dumps out the back. Thus, only clean air is able to make the turn and flow up to the engine's screened inlet. The figure shows debris laden air in orange flowing out the back and clean air in blue making the turn toward the engine.

TURBOSHAFT INLETS

Turboshaft engines in helicopters are subjected to some of the most adverse conditions any turbine engine could experience. Helicopters are able to take off and land from virtually any location, and during this operation they are directing a huge amount of air straight down against the ground. This air being



Figure 3-6. Rubber stripping inside a turbofan engine inlet allows for friction for short periods of time during changes in the flightpath.



Figure 3-7. The air that passes through the inner part of the fan blades becomes the primary airstream.



Figure 3-8. Air from the fan exhaust can be discharged overboard through short ducts directly behind the fan.

directed against the ground causes a lot of debris to be kicked up and eventually ingested by the engine. For this reason, a helicopter turboshaft engine must have a sand and ice separator as part of its inlet configuration, or some other type of air filtration system. **Figure 3-13** shows a sand and ice separator for a turboshaft engine that relies on the same concept shown for the turboprop in **Figure 3-12**. The air enters the inlet from the side, and on its way to the engine has to make a sharp turn. Any heavy debris in the air is forced to the outside and so only clean air makes the turn to enter the engine. Air laden with debris gets separated and the debris then drops into a sediment trap.

SUPERSONIC FLIGHT INLET DUCTS

All supersonic aircraft require a convergent-divergent inlet duct, either fixed or variable. Supersonic aircraft are configured with an inlet that slows the airflow to subsonic speed at the face of the engine, regardless of aircraft speed. Subsonic airflow into the compressor is required if the rotating airfoils are to remain free of shock waves. Even if the air is entering the inlet duct at Mach 2.0, by the time the air reaches the engine's compressor it is slowed down to approximately Mach 0.5.

Figure 3-14 depicts a nonadjustable convergent-divergent duct in which supersonic airflow is slowed by compression in its throat area (where the converging shape changes to diverging). After its velocity is reduced to slightly below Mach 1.0, the airflow enters the subsonic diffuser section where velocity is further reduced and its pressure increased before entering the engine compressor.

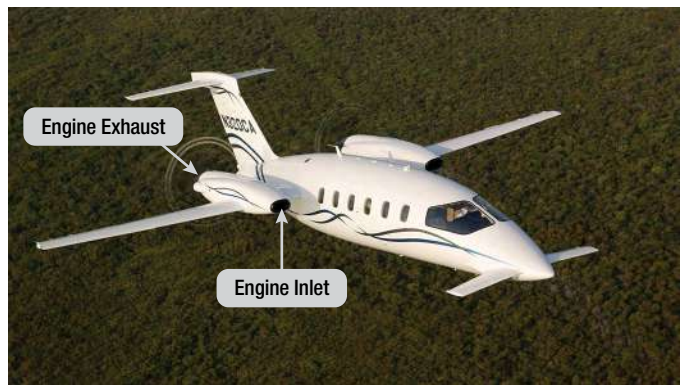


Figure 3-9. Piaggio Avanti engine inlet configuration.



Figure 3-10. Turbo Ag-Cat engine inlet configuration.

VARIABLE GEOMETRY DUCTS

In practice, inlet ducts for supersonic aircraft follows the general design of **Figure 3-14** only as much as practical. For very high speed aircraft, the shape of the duct can be changed by a movable restrictor such as a ramp or wedge inside the duct to form a convergent-divergent configuration of variable proportion. A duct of this type is known as a variable geometry inlet duct.

BELLMOUTH COMPRESSOR INLETS

A bellmouth inlet is usually installed on an engine undergoing testing in a test cell. [**Figure 3-15**] It is generally equipped with probes that can measure intake temperature and pressure.

During testing, it is important that the outside static air is allowed to flow into the engine with as little resistance as possible. The bellmouth is attached to the movable part of the test stand and moves with the engine. The thrust stand is made up of two components, one nonmoving and one moving. This is so the moving component can push against a load cell and measure thrust during the testing of the engine. The bellmouth is designed with the single objective of obtaining very high aerodynamic efficiency. Essentially, the inlet is a bell shaped funnel having carefully rounded shoulders which offer practically no air resistance. Duct loss is so slight that it is considered zero. The engine can therefore be operated without the complications resulting from losses common to an installed aircraft inlet duct. Engine performance data, such as rated thrust and thrust specific fuel consumption,

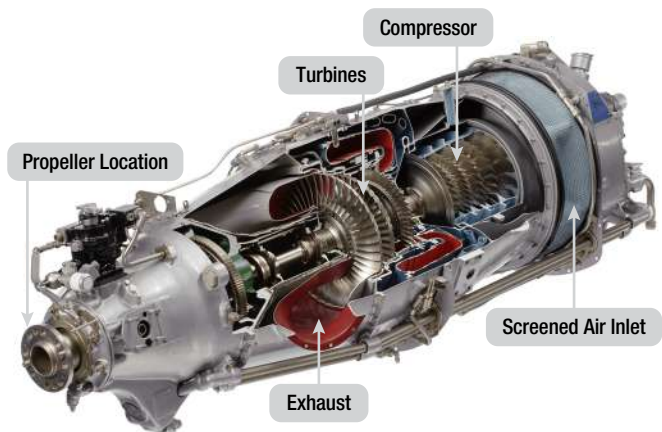


Figure 3-11. Pratt & Whitney PT6 layout of components.

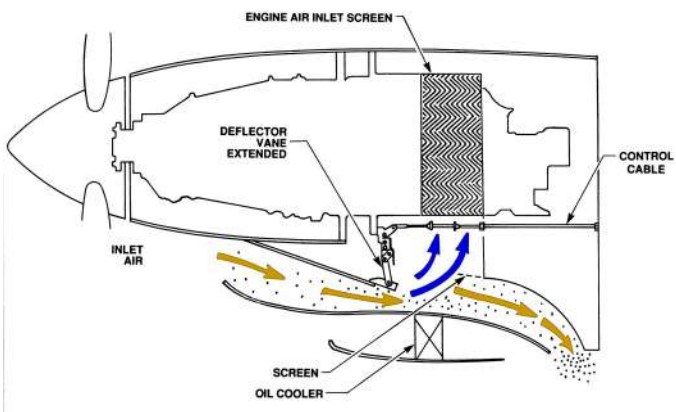


Figure 3-12. Turboprop sand and ice separator (inertial).

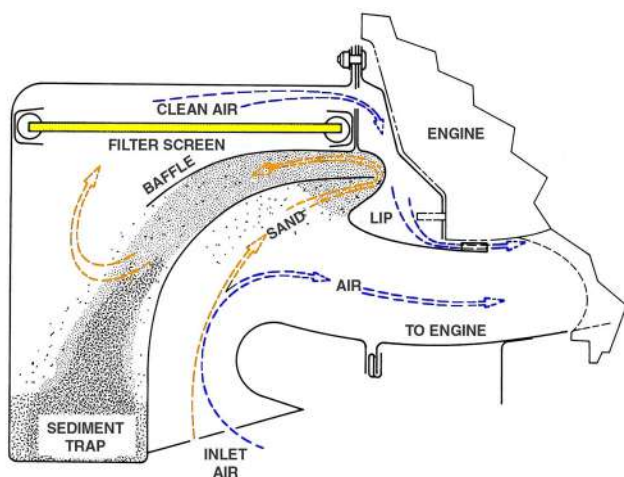


Figure 3-13. Turboshaft sand and ice separator (inertial).

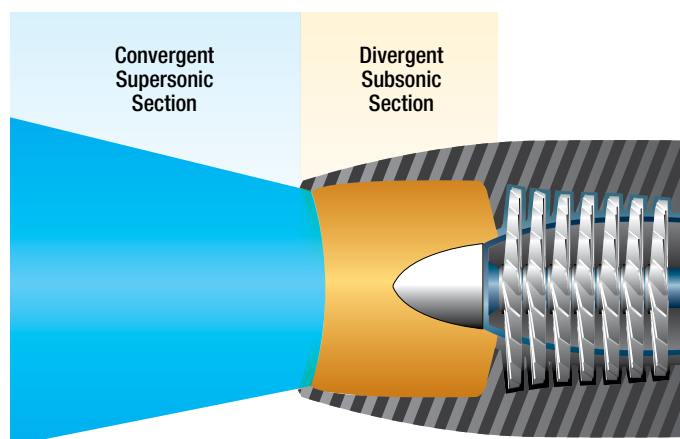


Figure 3-14. The aft section of an inlet duct acting as a subsonic diffuser.

are obtained while using a bellmouth inlet. Usually, the inlets are fitted with protective screening. In this case, the efficiency lost as the air passes through the screen must be taken into account when very accurate engine data are necessary.

COMPRESSOR INLET SCREENS

To prevent the engine from readily ingesting any items that can be drawn in the intake, a compressor inlet screen is sometimes placed across the engine air inlet at some location along the turboprops [Figure 3-16] and APUs [Figure 3-17] are not as vulnerable to FOD.

The advantages and disadvantages of a screen vary. If the engine is readily subjected to internal damage, as would be the case for an engine having an axial compressor fitted with aluminum compressor blades, an inlet screen is almost a necessity.

Screens, however, add appreciably to inlet duct pressure loss and are very susceptible to icing. Failure due to fatigue is also a problem. A failed screen can sometimes cause more damage than no screen at all. In some instances, inlet screens are made retractable and may be withdrawn from the airstream after takeoff or whenever

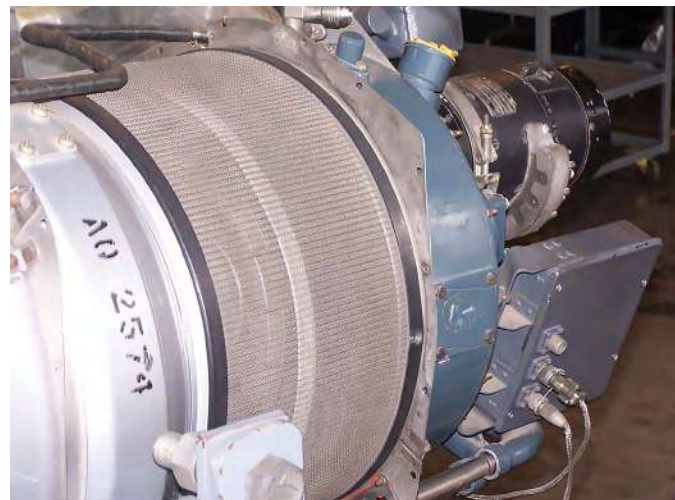


Figure 3-16. Example of a turboprop engine that incorporates inlet screens.



Figure 3-15. Bellmouth inlet mounted on test cell engine.

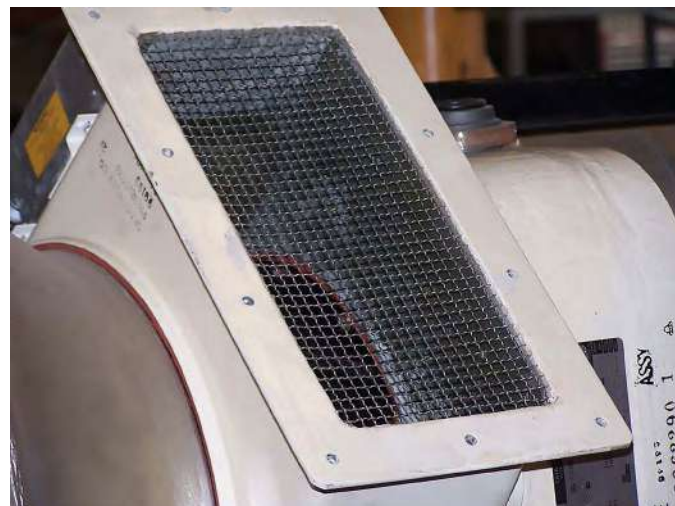


Figure 3-17. An example of an inlet screen on an APU.