

AVIATION MAINTENANCE TECHNICIAN CERTIFICATION SERIES

GAS TURBINE ENGINE

15



EASA 2023-889 COMPLIANT

Update notices for this book will be available online at www.actechbooks.com/revisions.html
If you would like to be notified when changes occur, please join our mailing list at www.actechbooks.com

VERSION	EFFECTIVE DATE	DESCRIPTION OF REVISION(S)
001	2016.01	Module creation and release.
002	2016.08	Format Updates
003	2017.11	Content updates and subject clarification.
004	2019.01	Fine tuned Submodule content sequence based on Appendix-A. Updated layout and styling.
004.1	2022.06	Inclusion of Measurement Standards for clarification, page iv. Minor appearance and format updates.
004.2	2023.04	Minor appearance and format updates.
005	2024.09	Regulatory update for EASA 2023-989 compliance.

Module was reorganized based upon the EASA 2023-989 subject criteria. Enhancements included in this version 005 are:

- 15.1 *Geared turbofan engines* - topic added.
- 15.3 *Turboprop and Turboshaft Engine Inlets* - topic added.
- 15.4 *Multispool designs* - topic added.
- 15.4 *Axial compressor blades, vanes, tips, and roots* - topic added.
- 15.4 *Compressor Rotor; drum, disk, and blisk types* - topic added.
- 15.4 *Combination compressors* - topic added.
- 15.4 *Compressor anti-stall bleed system* - topic added.
- 15.6 *Counter rotating turbines* - topic added.
- 15.8 *Labyrinth Seals* - topic added.
- 15.9 *Alternative and drop-in fuel* - topic added.
- 15.11 *Electronic power augmentation* - topic added.
- 15.13 *Large engine starter generators* - topic added.
- 15.13 *FADEC ignition system on GE CFM 56* - topic added.
- 15.15 *Power Augmentation* - replaced with alternative turbine construction.
- All Submodule questions/answers updated.
- Additional author and format enhancements.

TABLE OF CONTENTS

GAS TURBINE ENGINE

Revision Log	iii
Measurement Standards	iv
Basic Knowledge Requirements	v
Part 66 Basic Knowledge Requirements	vi
Table of Contents	ix

15.1 FUNDAMENTALS..... 1.1

Turbine Engine Fundamentals	1.1
Energy	1.1
Potential Energy	1.1
Kinetic Energy	1.2
Newton's Laws of Motion	1.2
Newton's First Law	1.2
Newton's Second Law	1.2
Newton's Third Law	1.2
Bernoulli's Principle	1.2
Boyle's & Charles' Law	1.3
The Brayton Cycle	1.3
Force, Work, Power, Motion	1.4
Force	1.4
Work	1.4
Power	1.5
Torque	1.6
Energy	1.6
Motion	1.6
Speed and Velocity	1.6
Acceleration	1.6
Fundamentals of Operation	1.7
Power and Weight	1.8
Fuel Economy	1.8
Durability and Reliability	1.8
Operating Flexibility	1.9
Compactness	1.9
Constructional Arrangement	1.9
Turbojet	1.9
Turbofan Engines	1.9
Geared Turbofan Engines	1.9
Geared Turbofan Gearbox	1.11
Turboshaft	1.11
Turboprop	1.12
Submodule 1 Practice Questions	1.13
Submodule 1 Practice Answers	1.14

15.2 ENGINE PERFORMANCE..... 2.1

Turbine Engine Operating Principles	2.1
Thrust	2.2
Gross (Static) Thrust	2.2
Net Thrust	2.2
Choked Nozzle Thrust	2.2
Thrust Horsepower	2.2
Thrust Distribution	2.3
Resultant Thrust	2.3
Equivalent Shaft HorsePower	2.3
Specific Fuel Consumption	2.3
Engine Efficiencies	2.4

Ram Recovery	2.5
Bypass Ratio	2.5
Engine Pressure Ratio	2.7
EPR measurement	2.7
Pressure, Temperature and Velocity of Exhaust Gas Flow	2.7
Engine Ratings	2.7
Flat Ratings	2.8
Limitation	2.8
Influence of Speed, Altitude and Climate	2.8
Submodule 2 Practice Questions	2.9
Submodule 2 Practice Answers	2.10

15.3 INLETS..... 3.1

Compressor Inlet Ducts	3.1
Inlet Configurations	3.1
Subsonic Flight Inlets	3.1
Turbofan Engine Inlet Sections	3.2
Turboprop Inlets	3.3
Turboshaft Inlets	3.3
Supersonic Flight Inlet Ducts	3.4
Variable Geometry Ducts	3.4
Bellmouth Compressor Inlets	3.4
Compressor Inlet Screens	3.5
Ice Protection	3.6
System Operation	3.6
Regulator Valve	3.6
Anti-icing with Electronic Engine Control and FADEC	3.6
Electrothermal Anti-icing Systems	3.8
Troubleshooting the Anti-icing System	3.8
Submodule 3 Practice Questions	3.9
Submodule 3 Practice Answers	3.10

15.4 COMPRESSORS..... 4.1

Compressor Section	4.1
Bleed Air	4.1
Construction Features, Operating Principles, and Applications	4.1
Centrifugal Flow Compressor	4.1
Axial Flow Compressors	4.3
Blades and Vanes	4.3
Tips and Roots	4.4
Compressor Rotor – Drum, Disk, or Blisk Type	4.4
Centrifugal and Axial Advantages and Disadvantages	4.5
Combination Compressors	4.5
Fan Balance	4.5
Operation	4.6
Cause and Effect of Compressor Stall	4.7
Methods of Airflow Control	4.7
Variable Angle Compressor Stator Vanes	4.8
Bleed Valves	4.8
Compressor Ratio	4.8
Submodule 4 Practice Questions	4.9
Submodule 4 Practice Answers	4.10

TABLE OF CONTENTS

15.5 COMBUSTION SECTION	5.1
Constructional Features.	5.1
Can Type Combustion Chamber.	5.2
Can-Annular Combustion Chamber.	5.2
Annular Combustion Chamber (Through Flow)	5.2
Annular Reverse Flow Combustor	5.3
Operation of Combustion Chambers	5.3
Combustion Chamber Performance	5.3
Combustion Intensity	5.3
Combustion Flameout.	5.3
Submodule 5 Practice Questions.	5.7
Submodule 5 Practice Answers	5.8
15.6 TURBINE SECTION	6.1
Operation and Characteristics of Turbine Types	6.1
Turbine Types	6.1
Axial Flow Turbine	6.1
Counter Rotating Turbines	6.2
Radial Inflow Turbine	6.2
Turbine Section Configuration	6.2
Turbine Stages	6.2
Turbine Housing	6.3
Turbine Blades	6.3
Impulse Configuration	6.3
Reaction Configuration	6.3
Impulse-Reaction Configuration.	6.3
Turbine Blade Construction	6.3
Turbine Blade Tips	6.4
Shrouds and Seals	6.4
Blade Clearance Control	6.5
Stators/Guide Vanes	6.6
Turbine Vane and Blade Cooling	6.7
Turbine Disk/Rotor.	6.7
Blade to Disk Attachment.	6.9
Turbine Blade Stress and Creep.	6.9
Submodule 6 Practice Questions.	6.11
Submodule 6 Practice Answers	6.12
15.7 EXHAUST	7.1
Construction and Principles of Operation	7.1
Exhaust Nozzle Shapes	7.2
Convergent Exhaust Nozzle	7.3
Convergent-Divergent Exhaust Nozzle.	7.4
Variable Area Exhaust Nozzles	7.4
Engine Noise Suppression	7.5
Thrust Reverser's	7.6
Thrust Vectoring	7.8
Submodule 7 Practice Questions.	7.9
Submodule 7 Practice Answers	7.10
15.8 BEARINGS AND SEALS	8.1
Construction and Principles of Bearings.	8.1
Construction and Principles of Seals.	8.2
Labyrinth Seals	8.2
Carbon Seals	8.2
Submodule 8 Practice Questions.	8.5

Submodule 8 Practice Answers	8.6
15.9 LUBRICANTS AND FUELS	9.1
Properties and Specifications of Turbine Engine Fuels.	9.1
Standard Fuel.	9.1
Fuel Volatility	9.1
Turbine Fuel Types	9.1
Fuel Identification	9.1
Fuel Purity.	9.2
Alternate Fuel and Drop-In Fuel	9.3
Properties and Specifications of Lubricants	9.3
Characteristics of Synthetic Lubricants.	9.3
Synthetic Lubricants	9.4
Spectrometric Oil Analysis Programs.	9.4
Fuel Additives	9.4
Anti-ice Additives	9.4
Anti-microbial Additives.	9.4
Safety Precautions	9.5
Submodule 9 Practice Questions.	9.7
Submodule 9 Practice Answers	9.8
15.10 LUBRICATION SYSTEMS.....	10.1
Lubrication System Components	10.1
Oil Tanks	10.1
Oil Pumps	10.3
Gear Pumps	10.3
Gerotor Pumps.	10.3
Vane Pumps	10.4
Oil Filters.	10.4
Filter Types	10.5
Filter Bypass Valves	10.5
Filter Pop-Out Warning	10.5
Lubrication System Valves.	10.5
Oil Pressure Regulating Valve.	10.5
Oil Pressure Relief Valve	10.6
Check Valves	10.6
Oil Jets	10.6
Breather Systems (Vents)	10.7
Rotary Air-Oil Separator	10.7
Oil Coolers.	10.7
Air Oil Coolers	10.7
Fuel Oil Coolers.	10.8
Thermostatic Bypass Valves.	10.8
Scavenge Systems.	10.8
Breather Pressurizing System	10.9
Magnetic Chip Detectors	10.9
Lubrication System Instrumentation.	10.10
Typical Lubrication Systems	10.10
Dry Sump Systems.	10.10
Pressure Regulated Lubrication.	10.10
Pressure System	10.10
Variable Dry Sump Systems	10.11
Pressure Subsystem	10.11
Scavenger Subsystem	10.11
Breather Subsystems	10.12
Wet Sump Systems	10.12

TABLE OF CONTENTS

Accessory Section	10.12	Air Turbine Troubleshooting Guide	13.8
Submodule 10 Practice Questions	10.13	Turbine Engine Ignition Systems	13.8
Submodule 10 Practice Answers	10.14	Capacitor Discharge Exciter Unit	13.10
15.11 FUEL SYSTEMS	11.1	Ignition System — FADEC Engine (GE/SNECMA CFM 56)	13.11
General Requirements	11.1	Power Supply	13.11
Turbine Engine Fuel Metering Systems	11.1	Igniter Selection	13.11
Hydromechanical Fuel Controls	11.2	System Operation	13.11
Hydropneumatic Fuel Controls	11.2	Igniter Plugs	13.12
Hydromechanical/Electronic Fuel Controls	11.2	Ignition System Inspection and Maintenance	13.13
FADEC Fuel Control Systems	11.4	Inspection	13.13
FADEC For An Auxiliary Power Unit	11.5	Check System Operation	13.13
FADEC for Propulsive Engines	11.5	Removal, Maintenance and Installation of Ignition System Components	13.13
Fuel System Operation	11.7	Ignition System Leads	13.13
Electronic Power Augmentation System	11.8	Igniter Plugs	13.14
Fuel System Layout and Components	11.8	Maintenance Safety Requirements	13.14
Main Fuel Pumps (Engine Driven)	11.8	Starting System Safety Precautions	13.14
Fuel Heater	11.8	Ignition System Safety	13.15
Fuel Filters	11.9	Submodule 13 Practice Questions	13.17
Fuel Spray Nozzles and Manifolds	11.10	Submodule 13 Practice Answers	13.18
Simplex Fuel Nozzle	11.11	15.14 ENGINE INDICATION SYSTEMS	14.1
Duplex Fuel Nozzle	11.11	Gas Temperature Indicator	14.1
Airblast Nozzles	11.11	Exhaust Gas Temperature (EGT) Indicator	14.1
Flow Dividers	11.12	Turbine Inlet Temperature Indicator	14.2
Fuel Pressurizing Valves	11.12	Engine Pressure Ratio (EPR)	14.2
Combustor Drain Valves	11.12	Oil Pressure and Temperature	14.3
Fuel Quantity Indicating Units	11.13	Oil Pressure Indicator	14.3
Submodule 11 Practice Questions	11.15	Oil Temperature Indicator	14.3
Submodule 11 Practice Answers	11.16	Fuel Pressure and Flow	14.4
15.12 AIR SYSTEMS	12.1	Fuel Pressure Indication	14.4
Turbine Engine Cooling	12.1	Fuel Flow Indicator	14.4
Zone Cooling	12.1	Synchronous Mass Flow Meter	14.4
Compressor Cooling	12.2	Motorless Mass Flow Meter	14.4
Combustion Chamber Cooling	12.2	Engine Speed	14.4
Turbine Section Cooling	12.3	Vibration Monitoring	14.5
Turbine Disk Cooling	12.3	Torque (Turboprop Engines)	14.5
Guide Vane and Blade Cooling	12.3	Modern Turbofan Powered Airliner — Engine Instruments Display	14.6
Accessory Cooling	12.3	Submodule 14 Practice Questions	14.7
Engine Compartment Ventilation and Cooling	12.3	Submodule 14 Practice Answers	14.8
Engine Bleed Air	12.3	15.15 ALTERNATE TURBINE CONSTRUCTIONS	15.1
Engine Anti-Icing Control	12.3	Geared Turbofan	15.1
Bearing Chamber Seal	12.4	Variable Fan Blades	15.1
External Air	12.4	Open Rotor/Propfan	15.2
Submodule 12 Practice Questions	12.5	Hybrid Turbine Electric Concepts and Electronic Power Augmentation	15.3
Submodule 12 Practice Answers	12.6	Future Trends and Development	15.4
15.13 STARTING AND IGNITION SYSTEMS	13.1	Submodule 15 Practice Questions	15.5
Turbine Engine Starters	13.1	Submodule 15 Practice Answers	15.6
Cartridge Pneumatic Starters	13.1	15.16 TURBOPROP ENGINES	16.1
Electric Starting Systems and Starter Generator Starting Systems	13.2	Introduction	16.1
Large Engine Starter Generators	13.4	Gas (Free Turbine) and Gear Coupled Engines	16.1
Troubleshooting a Starter Generator Starting System	13.4		
Air Turbine Starters	13.4		
Starter-Fadec Interface	13.8		

TABLE OF CONTENTS

Gas Coupled (Free Turbine)	16.1	Hydraulic Lines	19.4
Gear Coupled Turbines	16.2	O-Ring Seals	19.5
Reduction Gears	16.2	Feeders, Connectors and Wiring Looms	19.8
Parallel Spur Gears	16.2	Control Cables and Rods	19.9
Epicyclic Reduction Gears	16.3	Lifting Points	19.9
Fixed Annulus (Ring Gear)	16.3	Drains	19.9
Rotating Annulus (Ring Gear)	16.4	Submodule 19 Practice Questions	19.11
Integrated Engine and Propeller Controls	16.4	Submodule 19 Practice Answers	19.12
Control Levers	16.4		
Single Lever Control	16.4	15.20 FIRE PROTECTION SYSTEMS.....1	
Dual Lever Controls	16.4	Fire Protection Systems	1
Power Lever	16.4	Components	1
Beta Control	16.4	Engine Fire Detection Systems	2
Propeller Lever	16.4	Thermal Switch Systems	2
Control Lock	16.4	Thermocouple Systems	2
OVERSPEED SAFETY DEVICES.....16.6		Optical Fire Detection Systems	3
Automatic Drag Limiting System (Double Acting Propeller)	16.6	Infrared Optical Fire Protection	3
Pitch Locking	16.6	Pneumatic Thermal Fire Detection	3
Propeller Overspeed Governor	16.6	Continuous Loop Detector Systems	3
Turbine Shaft Failure	16.6	Fenwal Continouou loop System	4
Submodule 16 Practice Questions	16.7	Kidde Continouous loop System	4
Submodule 16 Practice Answers	16.8	Sensing Element	4
		Combination Fire and Overheat Warning	5
15.17 TURBOSHAFT ENGINES.....17.1		Temperature Trend Indication	5
Arrangements	17.1	System Test	5
Drive System	17.1	Dual Loop Systems	5
Reduction Gearing	17.2	Automatic Self Interrogation	5
Couplings and Drive Systems	17.2	Support Tube Mounted Sensing Elements	5
Control Systems	17.2	Fire Detection Control Unit (Fire Detection Card)	6
Submodule 17 Practice Questions	17.5	Fire Zones	6
Submodule 17 Practice Answers	17.6	Engine Fire Extinguishing System	6
		Fire Extinguishing Agents	6
15.18 AUXILIARY POWER UNITS (APUS).....18.1		Turbine Engine Ground Fire Protection	6
Purpose	18.1	Containers	6
Construction	18.1	Discharge Valves	7
Engine Systems	18.1	Pressure Indication	7
Flight Certified APU's	18.3	Two Way Check Valve	7
Operation	18.4	Discharge Indicators	8
APU Control	18.4	Red Disk Thermal Indicator	8
Crew Control and Monitoring	18.5	Yellow Disk Discharge Indicator	8
Inspection and Servicing	18.5	Fire Switches	8
Protective Systems	18.6	Warning Systems	8
Submodule 18 Practice Questions	18.7	Boeing 777 System Example	8
Submodule 18 Practice Answers	18.8	Detection Systems	9
		Overheat Detection	9
15.19 POWERPLANT INSTALLATION.....19.1		Fire Detection	9
Powerplant Installations	19.1	Nacelle Temperature Recording	9
Firewalls	19.1	Continuous Fault Monitoring	9
Cowlings	19.1	Single/Dual Loop Operation	9
C Duct Cowls	19.1	System Test	9
Acoustic Panels	19.1	Fire Extinguisher Containers	9
Engine and Anti-Vibration Mounts	19.2	Squib	11
Engine Mountings	19.2	Engine Fire Switches	11
Turbine Vibration Isolation Engine Mounts	19.3	Engine Fire Operation	12
Hoses and Pipes	19.3	APU Fire Detection System	13
Fuel Lines	19.3	APU Fire Warning	13

TABLE OF CONTENTS

Fire Bottle Discharge	13	Inspection of Stored Engines.	22.3
Submodule 20 Practice Questions.....	15	Depreservation of Turbine Engines.	22.3
Submodule 20 Practice Answers	16	Depreservation of Engine Accessories	22.3
15.21 ENGINE MONITORING AND GROUND OPERATION.....	21.1	Submodule 22 Practice Questions.....	22.5
Procedures for Starting and Ground Run-up	21.1	Submodule 22 Practice Answers	22.6
Turbine Engine Operation	21.1	Acronym Definitions.....	A.1
Ground Operation Engine Fire.....	21.1		
Engine Checks.....	21.2		
Checking Takeoff Thrust.....	21.2		
Ambient Conditions	21.2		
Engine Shutdown	21.3		
Turboprop Operation.....	21.3		
Interpretation of Power Output and Parameters.....	21.3		
Interpretation for Turboprop Engines.....	21.3		
Health and Trend Monitoring.....	21.3		
In-flight Recorders.....	21.3		
Ground Indicators	21.3		
Magnetic Plugs or Chip Detectors	21.5		
Oil Debris Monitoring	21.5		
Oil Filters.....	21.5		
Spectrometric Oil Analysis Program.....	21.5		
Typical Wear Metals and Additives	21.7		
Vibration Monitoring	21.7		
Borescope.....	21.7		
Inspection of Engines and Components	21.8		
Compressor Section.....	21.8		
Inspection and Cleaning	21.8		
Causes of Blade Damage	21.9		
Blending and Replacement	21.10		
Combustion Section Inspection	21.11		
Marking Materials for Combustion Section Parts	21.12		
Inspection and Repair of Combustion Chambers.....	21.12		
Fuel Nozzle and Support Assemblies	21.12		
Turbine Section	21.12		
Turbine Disk Inspection	21.12		
Turbine Blade Inspection.....	21.12		
Turbine Blade Replacement.....	21.13		
Turbine Nozzle Inlet Guide Vane Inspection	21.13		
Clearances	21.14		
Exhaust Section	21.14		
Engine Accessories	21.15		
Compressor Washing.....	21.15		
Foreign Object Damage (FOD)	21.16		
Engine Design and FOD	21.17		
Engine and Airframe Designs which Avoid FOD	21.17		
Submodule 21 Practice Questions.....	21.19		
Submodule 21 Practice Answers	21.20		
15.22 ENGINE STORAGE AND PRESERVATION	22.1		
Corrosion Preventive Compounds.....	22.1		
Dehydrating Agents.....	22.2		
Fuel System Inhibiting	22.2		
Motoring Method	22.2		
Pressure Rig Method.....	22.2		
Engine Containers.....	22.2		

THRUST

Using the formula below, compute the force necessary to accelerate a mass of 50 pounds by 100 ft/sec².

$$F = \frac{MA}{G}$$
$$F = \frac{50 \text{ lb} \times 100 \text{ ft/sec}^2}{32.2 \text{ ft/sec}^2}$$
$$F = \frac{5\,000 \text{ lb-ft/sec}^2}{32.2 \text{ ft/sec}^2}$$
$$F = 155 \text{ lb}$$

This illustrates that if the velocity mass per second is increased by 100, the resulting thrust is 155 pounds.

Since the turbojet engine accelerates air, the following formula can be used to determine jet thrust:

$$F = \frac{M_s (V_2 - V_1)}{G}$$

Where:

- F = Force in pounds
- M_s = Mass flow in lb/sec
- V₁ = Inlet velocity
- V₂ = Jet velocity (exhaust)
- V₂ - V₁ = Change in velocity; difference between inlet velocity and jet velocity
- G = Acceleration of gravity or 32.2 ft/sec²

As an example, to use the formula for changing the velocity of 100 pounds of mass airflow per second from 600 ft/sec to 800 ft/sec, the formula can be applied as follows:

$$F = \frac{100 \text{ lb/sec} (800 \text{ ft/sec} - 600 \text{ ft/sec})}{32.2 \text{ ft/sec}^2}$$
$$F = \frac{20\,000 \text{ lb/sec}}{32.2 \text{ ft/sec}^2}$$
$$F = 621 \text{ lb}$$

As shown by the formula, if the mass airflow per second and the difference in the velocity of the air from the intake to the exhaust are known, it is easy to compute the force necessary to produce the change in the velocity. Therefore, the thrust of the engine must be equal to the force required to accelerate the air mass through the engine. Then, by using the symbol "F_n" for thrust pounds, the formula becomes:

$$F_n = \frac{M_s (V_2 - V_1)}{G}$$

Thrust of a gas turbine engine can be increased by two methods: increasing the mass flow of air through the engine or increasing the gas velocity. If the exhaust velocity of the turbojet engine remains constant with respect to the aircraft, the thrust decreases if the speed of the aircraft is increased. This is because V₁ increases in value. This does not present a serious problem, however, because as the aircraft speed increases, more air enters the engine, and the engine's exhaust velocity increases. The resultant net thrust is almost constant with increased airspeed.

GROSS (STATIC) THRUST

Gross or static thrust is developed when the engine is on the ground and stationary. Velocity of the airflow entering the engine changes and affects thrust when the aircraft is in flight. [Figure 2-1]

NET THRUST

Net thrust is the actual thrust developed by the engine at any given moment. In order to calculate net thrust the acceleration imparted to the airflow should be known. This actual or true acceleration is the difference in velocity between the incoming and outgoing airflow.

$$\text{Net Thrust} = \text{Gross Thrust} - \text{Ram Drag}$$

If the mass airflow per second and the difference in the velocity of the air from the intake to the exhaust are known, you can compute the force necessary to produce the change in the velocity. Therefore, the thrust of the engine must be equal to the force required to accelerate the air mass through the engine.

CHOKED NOZZLE THRUST

Bernoulli's principle (when a fluid has its velocity increased at a given point, the pressure of the stream at that point is less than the rest of the stream) is applied to gas turbine engines through the design of convergent and divergent air ducts. The convergent duct increases velocity and decreases pressure. The divergent duct decreases velocity and increases pressure. The convergent principle is usually used for the exhaust nozzle. The divergent principle is used in the compressor and diffuser where the air is slowing and pressurizing.

When an exhaust nozzle is convergent the velocity of gases leaving the rear of the engine increases. This is desirable for the development of maximum thrust. As the gases approach the speed of sound, the nozzle is said to be choked and choked nozzle thrust is produced. This means the highest efficiency has been obtained in the engine for subsonic flight. However, at the speed of sound, the exhaust gases will produce a shock wave which deteriorates performance. [Figure 2-2]

THRUST HORSEPOWER

Thrust horsepower can be computed when the net thrust and the speed of the airplane are known. One horsepower is equal to 33 000 foot-pounds of work per minute, which is the same as 375 mile/pounds per hour. When an airplane is flying at 375 mph,



Figure 2-1. Gross thrust from a static turbojet engine.

each pound of thrust is the equivalent of one horsepower. When the speed of the airplane is doubled, the amount of horsepower produced by each pound of thrust is also doubled.

THRUST DISTRIBUTION

The thrust developed by an engine can be thought of as being contributed by the various sections of the engine during the continuous combustion cycle. Thrust distribution can be seen by examining the loads produced in a representative turbojet engine. [Figure 2-3]

Note that in the forward part of the engine, due to Newton's second law, loads are in the forward direction. As the gases go throughout the nozzle guide vanes and the turbine, loads shift to the rearward direction. Power is extracted and drag occurs. Drag, which continues as the gases make their way throughout the exhaust section, is a significant force. The resultant thrust is in the forward direction.



Figure 2-2. Variable exhaust ducts on military aircraft create convergent or divergent conditions.

RESULTANT THRUST

In the forward part of the engine, due to Newton's second law, loads are in the forward direction. As the gases go throughout the nozzle guide vanes and the turbine, loads shift to the rearward direction. Power is extracted and drag occurs. Drag, which continues as the gases make their way throughout the exhaust section, is a significant force. The resultant thrust is in the forward direction. The resultant thrust of the engine is the sum of the thrust forces of all the engine main components, including the compressor, combustion chamber, turbine and the exhaust sections.

EQUIVALENT SHAFT HORSEPOWER

A gas turbine engine that delivers power through a shaft to operate something other than a propeller is referred to as a turboshaft engine. Turboshaft engines are similar to turboprop engines. The power take off may be coupled directly to the engine turbine or the shaft may be driven by a free turbine. The free turbine is located downstream of the engine turbine, being connected to the main engine only by the hot stream of gases. This principle is used in the majority of turboshaft engines and used extensively in helicopters and hovercraft.

SPECIFIC FUEL CONSUMPTION

The usual method of describing the fuel economy of aircraft engines is specific fuel consumption. Specific fuel consumption (SFC) is the fuel flow measured in (lbs/hr) divided by thrust (lbs). Equivalent specific fuel consumption is used for turboprop engines and is measured as fuel flow in pounds per hour divided by a turboprop's equivalent shaft horsepower. Comparisons can be made between various engines on this basis. At low speed, reciprocating and turboprop engines have better economy than turbojet or turbofan engines. However, because of losses in propeller efficiency, a turboprop engine's efficiency becomes limited above 400 mph.

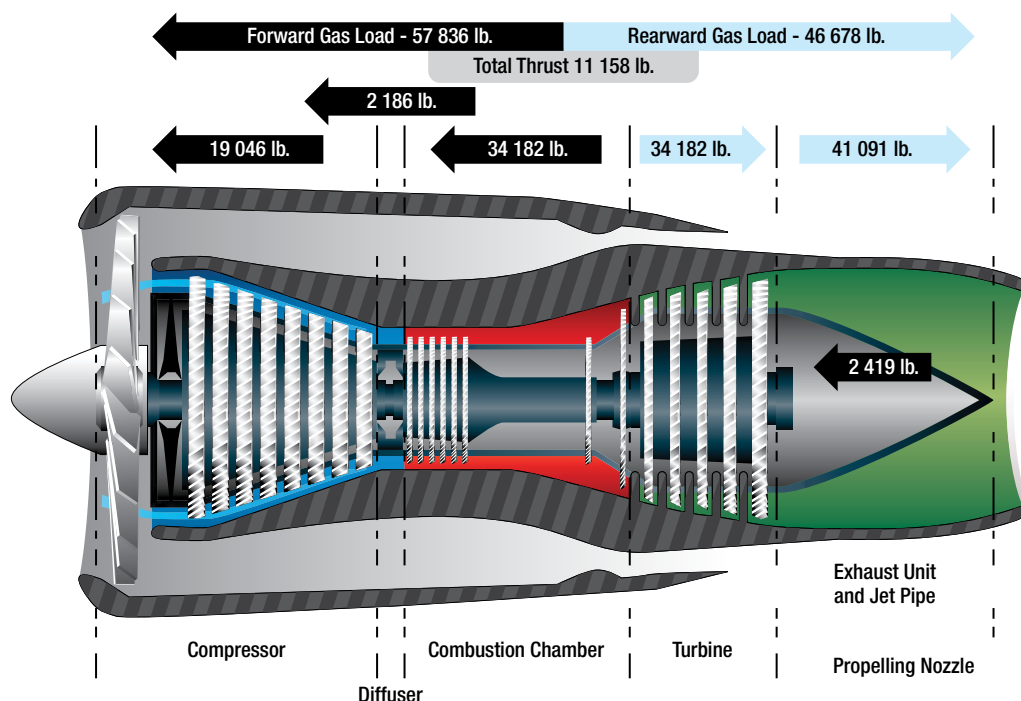


Figure 2-3. Forward and rearward load production on a turbojet engine.

In the interest of fuel economy and aircraft range, the thrust or shaft horsepower per weight should be at its maximum with the fuel consumption as low as possible. Obviously, the more thrust we can obtain per pound of fuel, the more efficient the engine is.

ENGINE EFFICIENCIES

Thermal efficiency is a prime factor in gas turbine performance. It is the ratio of net work produced by the engine to the chemical energy supplied in the form of fuel. The three most important factors affecting the thermal efficiency are turbine inlet temperature, compression ratio, and the component efficiencies of the compressor and turbine. Other factors that affect thermal efficiency are compressor inlet temperature and combustion efficiency. **Figure 2-4** shows the effect that changing compression ratio (compressor pressure ratio) has on thermal efficiency when compressor inlet temperature and the component efficiencies of the compressor and turbine remain constant.

The effects that compressor and turbine component efficiencies have on thermal efficiency when turbine and compressor inlet temperatures remain constant are shown in **Figure 2-5**. In actual operation, the turbine engine exhaust temperature varies directly with turbine inlet temperature at a constant compression ratio.

RPM is a direct measure of compression ratio; therefore, at constant rpm, maximum thermal efficiency can be obtained by maintaining the highest possible exhaust temperature. Since engine life is greatly reduced at high turbine inlet temperatures, the operator should not exceed the exhaust temperatures specified for continuous operation. **Figure 2-6** illustrates the effect of turbine inlet temperature on turbine blade life. In the previous discussion, it was assumed that the state of the air at the inlet to the compressor remains constant. Since this is a practical application of a turbine engine, it becomes necessary to analyze the effect of varying inlet conditions on the thrust or power produced. The three principal variables that affect inlet conditions are the speed of the aircraft, the altitude of the aircraft, and the ambient temperature. To make the analysis simpler, the combination of these three variables can be represented by a single variable called stagnation density.

The power produced by a turbine engine is proportional to the stagnation density at the inlet. The next three illustrations show how changing the density by varying altitude, airspeed, and outside air temperature affects the power level of the engine. **Figure 2-7** shows that the thrust output improves rapidly with a reduction in outside air temperature (OAT) at constant altitude, rpm, and

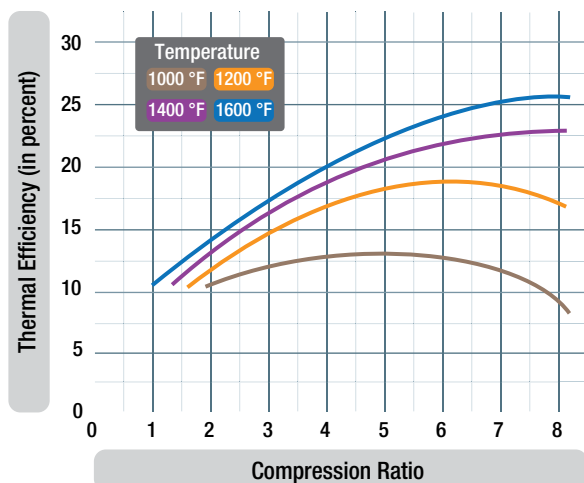


Figure 2-4. The effect of compression ratio on thermal efficiency.

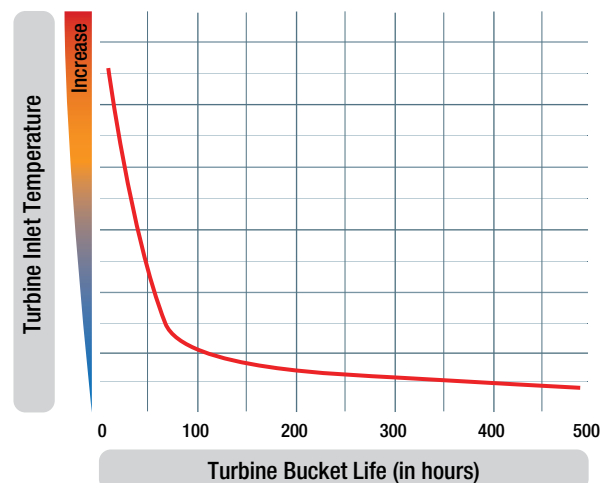


Figure 2-6. Effect of turbine inlet temperature on turbine bucket life.

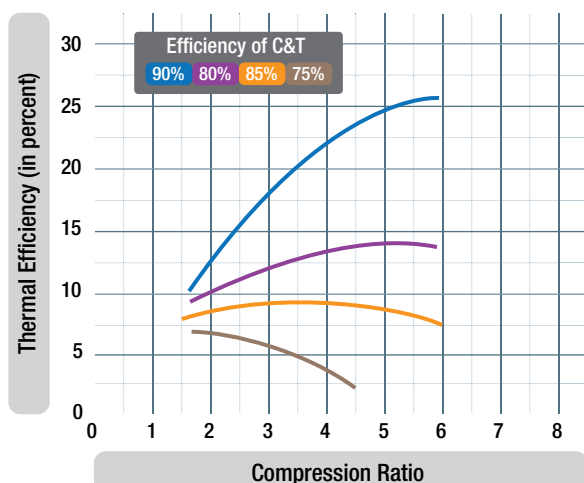


Figure 2-5. Turbine and compressor efficiency vs. thermal efficiency.

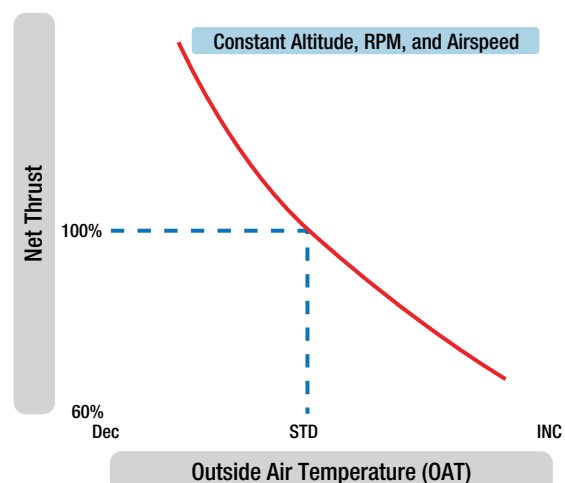


Figure 2-7. Effect of OAT on thrust output.

airspeed. This increase occurs partly because the energy required per pound of airflow to drive the compressor varies directly with the temperature, leaving more energy to develop thrust. In addition, the thrust output increases since the air at reduced temperature has an increased density. The increase in density causes the mass flow through the engine to increase.

The altitude effect on thrust, as shown in **Figure 2-8**, can also be discussed as a density and temperature effect. In this case, an increase in altitude causes a decrease in pressure and temperature. Since the temperature lapse rate is lower than the pressure lapse rate as altitude is increased, the density is decreased. Although the decreased temperature increases thrust, the effect of decreased density more than offsets the effect of the colder temperature. The net result of increased altitude is a reduction in the thrust output.

The effect of airspeed on the thrust of a gas-turbine engine is shown in **Figure 2-9**. To explain the airspeed effect, it is necessary to understand first the effect of airspeed on the factors that combine to produce net thrust: specific thrust and engine airflow. Specific thrust is the net thrust in pounds developed per pound of airflow per second. It is the remainder of specific gross thrust minus specific ram drag. As airspeed is increased, ram drag increases rapidly. The exhaust velocity remains relatively constant; thus, the effect of the increase in airspeed results in decreased specific thrust. [Figure 2-9]

In the low-speed range, the specific thrust decreases faster than the airflow increases and causes a decrease in net thrust. As the airspeed increases into the higher range, the airflow increases faster than the specific thrust decreases and causes the net thrust to increase until sonic velocity is reached. The effect of the combination on net thrust is illustrated in **Figure 2-10**.

RAM RECOVERY

A rise in pressure above existing outside atmospheric pressure at the engine inlet, as a result of the forward velocity of an aircraft, is referred to as ram pressure. Since any ram effect causes an increase in compressor entrance pressure over atmospheric, the resulting pressure rise causes an increase in the mass airflow and gas velocity, both of which tend to increase thrust. Although ram effect increases engine thrust, the thrust being produced by the engine decreases for a given throttle setting as the aircraft gains airspeed. Therefore, two opposing trends occur when an aircraft's speed is increased. What actually takes place is the net result of these two different effects. An engine's thrust output temporarily decreases as aircraft speed increases from static, but soon ceases to decrease. Moving toward higher speeds, thrust output begins to increase again due to the increased pressure of ram recovery.

BYPASS RATIO

Turbofan engines can be low bypass or high bypass. The amount of air that is bypassed around the core of the engine determines the bypass ratio. As can be seen in **Figure 2-11**, the air generally driven by the fan does not pass through the internal working core of the engine. The amount of air flow in lbs/sec from the fan bypass compared to the amount of air that flows through the core of the engine is the bypass ratio.

$$\text{Bypass ratio} = \frac{100 \text{ lb/sec flow fan}}{20 \text{ lb/sec flow core}} = 5:1 \text{ bypass ratio}$$

Turbofan engines are generally categorized as high bypass or low bypass in accordance with their bypass ratios. Most transport category aircraft use high bypass engines. Some low-bypass

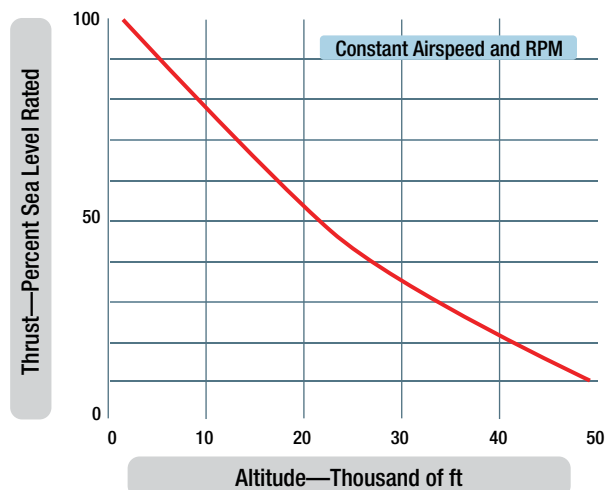


Figure 2-8. Effect of altitude on thrust output.

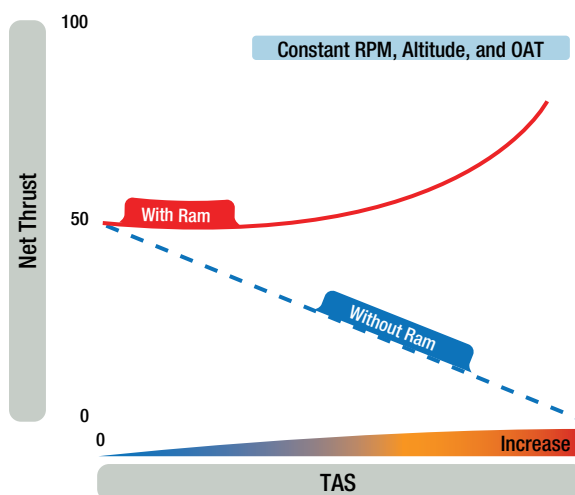


Figure 2-9. Effect of airspeed on net thrust.

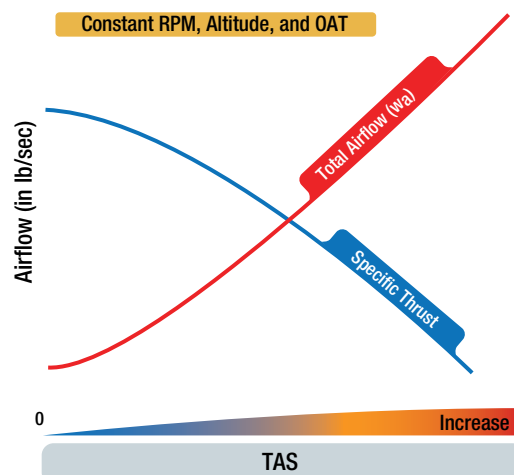


Figure 2-10. Effect of airspeed on specific thrust and total engine airflow.