

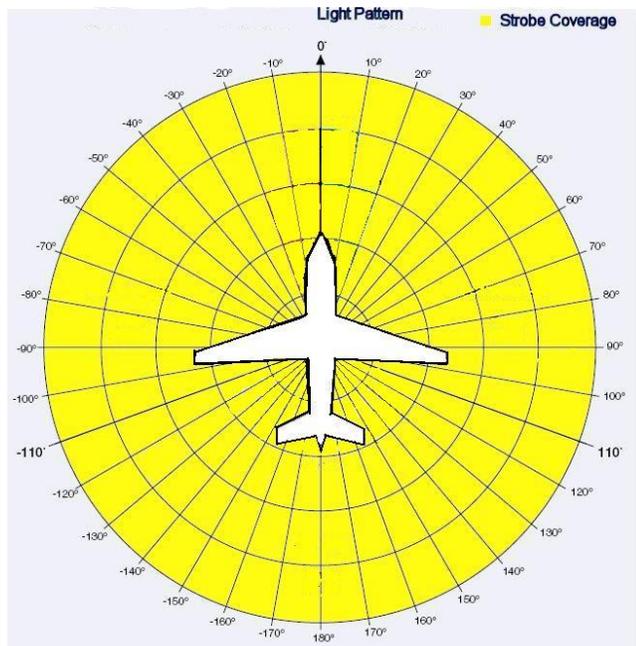


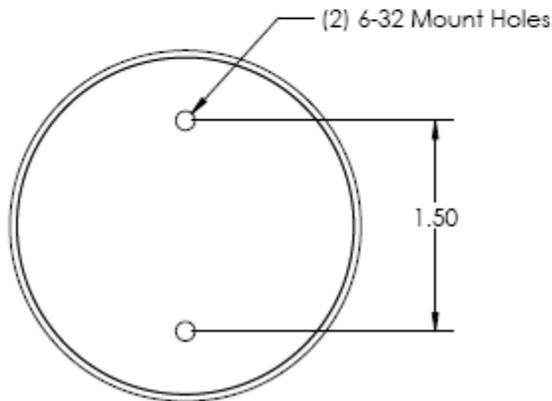

**Product Datasheet**  
**SunBeacon II 360 White LED Beacon**  
**11-2200-B-12 (12V)**  
**11-2200-B-24 (24V)**

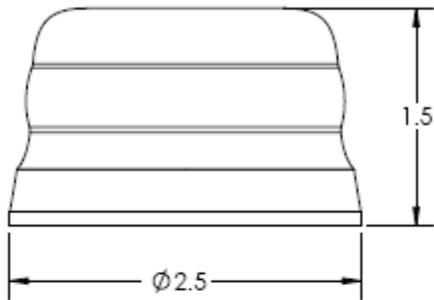

Voltage: 9-16VDC 12V  
 18-32VDC 24V  
 Strobe Average Current: 1.2A at 14V, 0.6A at 28V  
 Strobe Peak Current: 8.8A at 14V, 4.4A at 28V  
 Power: 16 Watts Average  
 Power Supply: Built In  
 Synchronization: Built In  
 Thermal Protection: Built In  
 Beacon: TSO-C96a Class II  
 LED Count: 48

Length: 2.5"  
 Width: 2.5"  
 Height: 1.5"  
 Weight: 4.1 Oz  
 Heat Sink Material: Aluminum/Clear Anodized  
 Lens Material: Polycarbonate  
 MTBF: >30,000 Hours  
 Temperature Range: -55C to +70C