

# SADDLES - FITTINGS - TANGS - BRACKETS


## ALUMINUM SADDLE



Specs: Fits 1.63 inch I Base OD 1.0 inch I Hole 0.266 inch I Height 0.125 inch Super-tough saddles. Made of aluminum.

P/N-Type 4315/I ..... P/N 04-00927 ..... ---

## CABLE FITTINGS

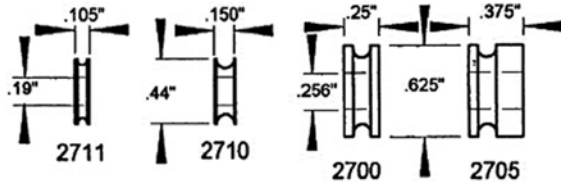

| Description                      | Part No. | Price |
|----------------------------------|----------|-------|
| 1/16" Cable, Steel, AN111-3      | 05-01939 | ---   |
| 3/32" Cable, Aluminum            | CF2700   | ---   |
| 3/32" Cable, Aluminum            | CF2705   | ---   |
| 1/16" Cable, Stainless, AN111C-3 | CF2710S  | ---   |

## NYLON WASHERS



05-01969



05-01970

| Model  | Part No. | O.D. | I.D. | Thickness | Price Ea. |
|--------|----------|------|------|-----------|-----------|
| NW2059 | 05-01970 | .875 | .256 | .031      | ---       |
| NW2055 | 05-01969 | .256 | .500 | .060      | ---       |


## CONTROL CABLE FAIRINGS



Injection molded ABS plastic fairings used to cover hole in airframe where control cables emerge such as the rudder cables at the rear of the fuselage. May be installed on any airframe surface but is most normally used on fabric covered aircraft where they are bonded on with fabric cement and covered with a fabric patch ..... P/N 05-05750 ..... --- pair


## TANGS

Made of 304 stainless steel. All measurements are in inches.

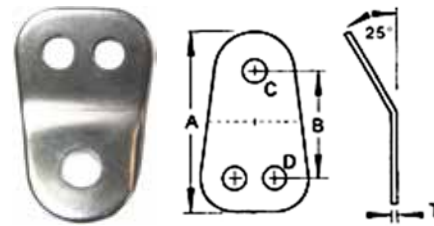

| No. | Maxair  | Description | T   | A    | B    | C   | D   | Part No. | Price |
|-----|---------|-------------|-----|------|------|-----|-----|----------|-------|
| 3   | T11-DFT | 3-Hole Flat | 14G | 1.91 | 1.09 | .26 | .26 | 05-02077 | ---   |
|     | T8-DFT  | 3-Hole Flat | 12G | 1.91 | 1.09 | .32 | .26 | 05-02078 | ---   |

## ALUMINUM BRACKETS

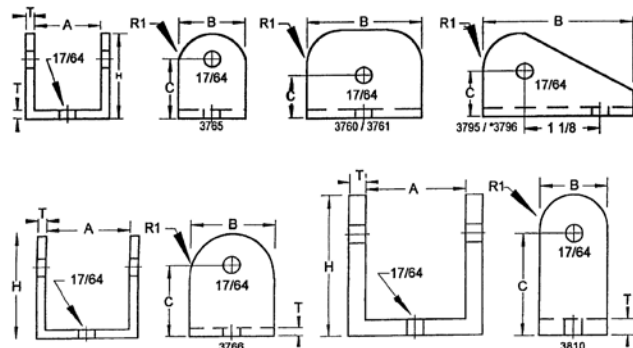

| Model | Part No. | A     | B     | C     | H     | T    | R1   | ALLOY   | Each |
|-------|----------|-------|-------|-------|-------|------|------|---------|------|
| B3772 | 05-01930 | .500  | .750  | .500  | .750  | .125 | ---  | 6061-T6 | ---  |
| B3765 | 05-01928 | 1.000 | 1.000 | .875  | 1.250 | .125 | .500 | 6063-T5 | --   |
| B3760 | 05-01926 | 1.000 | 1.750 | .625  | 1.250 | .125 | .500 | 6063-T5 | --   |
| B3761 | 05-01927 | 1.000 | 1.750 | .906  | 1.250 | .125 | .750 | 6063-T5 | --   |
| B3795 | ---      | 1.000 | 2.250 | .670  | 1.250 | .125 | .500 | 6063-T5 | --   |
| B3766 | 05-01929 | 1.250 | 1.250 | 1.062 | 1.500 | .125 | .750 | 6063-T5 | --   |
| B3796 | ---      | 1.250 | 2.375 | .875  | 1.500 | .125 | .500 | 6063-T5 | --   |
| B3810 | 05-01931 | 1.500 | 1.000 | 1.500 | 2.000 | .250 | .500 | 6061-T6 | --   |

## ELBOW FITTINGS



These are tube fittings used to assemble parts to an ultralight frame. No specific ultralight or application.

1" x .083" ..... P/N 15-05250 ..... ---  
1" x .058" ..... P/N 15-05249 ..... ---

## PLUG BUTTONS

Nickel Plated Plug Buttons.



| Manufacture Part No. | Hole Size | Head Diameter | Panel Thickness | Material        | Finish | Part Number | Price |
|----------------------|-----------|---------------|-----------------|-----------------|--------|-------------|-------|
| 3750                 | 1/4"      | 13/32"        | 0.035-0.062"    | Steel           | Nickel | 04-04112    | ---   |
| 3751                 | 3/8"      | 1/2"          | 0.037-0.078"    | Steel           | Nickel | 04-04113    | ---   |
| 3752                 | 1/2"      | 21/32"        | 0.037-0.062"    | Steel           | Nickel | 04-04114    | ---   |
| 3753                 | 5/8"      | 13/16"        | 0.062-0.078"    | Stainless Steel | --     | 04-04115    | ---   |
| 3754                 | 3/4"      | 15/16"        | 0.037-0.093"    | Steel           | Nickel | 04-04116    | ---   |
| 3755                 | 7/8"      | 1-1/16"       | 0.031-0.093"    | Stainless Steel | --     | 04-04117    | ---   |
| 3756                 | 1"        | 1-1/8"        | 0.062-0.093"    | Stainless Steel | --     | 04-04118    | ---   |
| 10231                | 1-1/4"    | 1-7/16"       | 0.062-0.093"    | Steel           | Nickel | 04-04119    | ---   |
| 10232                | 1-1/2"    | 1-21/32"      | 0.038-0.141"    | Steel           | Nickel | 04-04120    | ---   |